




ALLNET ALL048600

LT Power over Ethernet Gigabit Repeater up to 90W

- 2x Gigabit Ethernet ports PoE (Data and Power)
- LT PoE++, IEEE802.3 at+ / at / af
- up to 6 Repeater cascadable

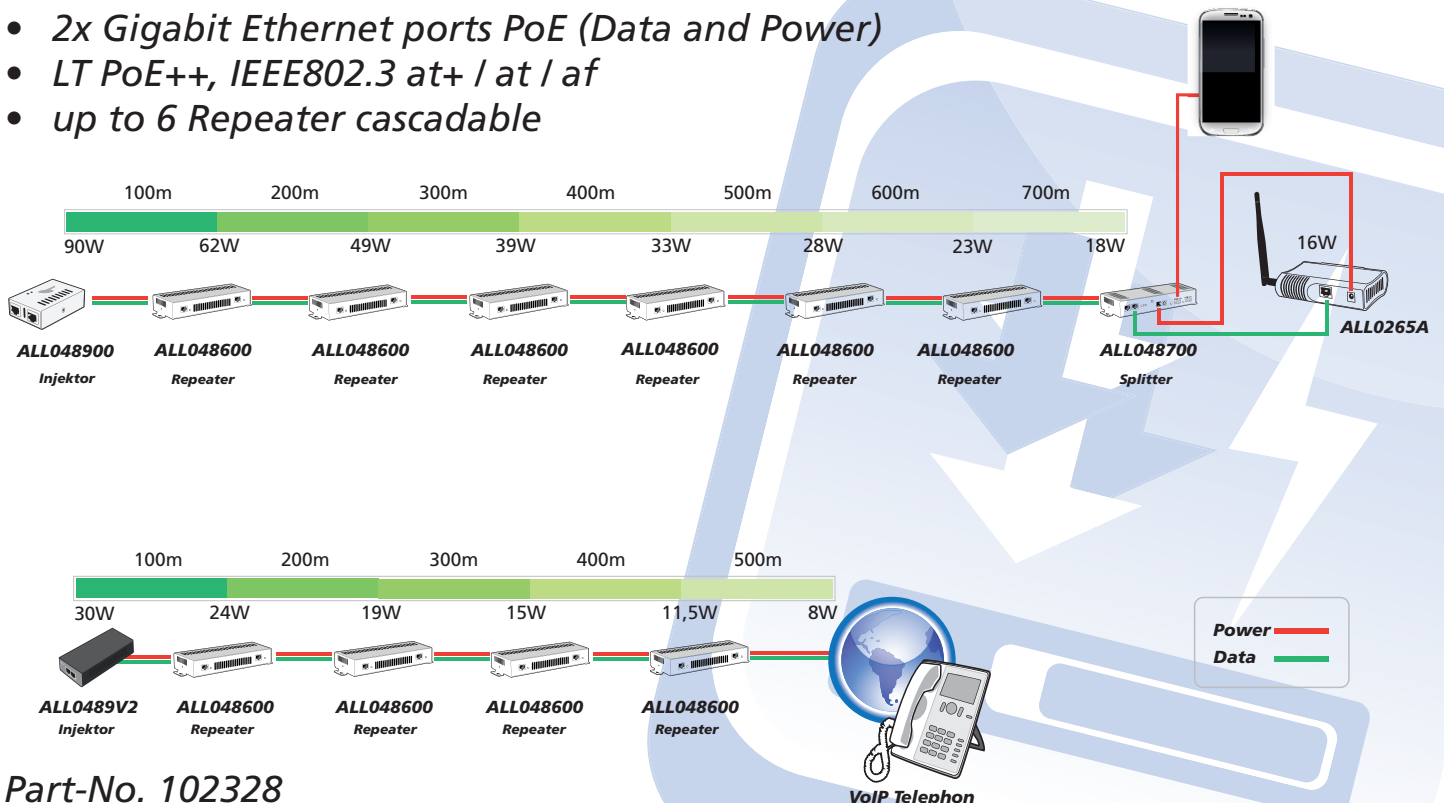

Part-No. 102328

Note: Product specification is subject to change without notice.



Power over Ethernet, extend easily additional 100m.

The Power Over Ethernet repeater extends the ALL048600 ALLNET PoE and network range to 100m. Depending on the PoE input power up to 6 repeaters can be connected together in a row. We recommend e.g. the ALLNET ALL048900 LT PoE injector for optimum power output.

Item	Specification
Supported Standards:	<ul style="list-style-type: none">• LT PoE++• IEEE802.3af Power over Ethernet• IEEE802.3at Power over Ethernet enhancements• IEEE802.3 10BaseT• IEEE802.3u 100BaseTX• IEEE 802.3ab 1000BaseT
Interfaces:	<ul style="list-style-type: none">• 1x RJ45 Eingang (Daten und Strom)• 1x RJ45 Ausgang (Daten und Strom)
Power Input	PoE 36~57V
Power Output	LT PoE++, 802.3af/at/at+
Power consumption	System: 2,1A (Max.120W), StandBy: typ. 1,5W
Housing:	Metal case
Maße:	Length/width/Height: 200 x 80 x 30 mm
Weight:	253g (only device)
Environment:	<ul style="list-style-type: none">• Temperature operating: 0 to 40°C• Temperature storage: -20 to 90°C• Humidity: 10 to 90% (non condensed)
Marking:	CE