

## ALLNET Switch Modul ALL4765-INDU SFP(Mini-GBIC), 1000Mbit, RJ45(TP), Industrial -40/+85 Grad,



### EAN CODE



RJ45-Anschluss, SFP, 100m Reichweite, Industrial -40 --+85Grad, uncodiert, Realtek chipset: write SX optical module code  
für Allnet/AlliedTelesyn/Avago/Avaya/Cambium/D-link/Entersys/Mikrotik/Netgear/Lancom/QNAP/Planet/Ubiquiti/Zyxel/ZTE,

## Merkmale

Merkmal	Wert
Einsatzort:	Standard
Entfernung:	100m
Geschwindigkeit Mini-GBIC:	1000Mbit
Kompatibilität:	uncodiert
Mode:	TP/RJ45 Kupfer
SFP:	SFP
Gewicht:	0.035 Kg
Garantie:	24 Monate

## Zubehör

Art.-Nr.	Name
193997	ALLNET Switch full managed 8 Port Gigabit 130W / 8x PoE+ / 2x SFP / Lüfterlos / 19" / "ALL-SG8610PM"
127210	ALLNET Switch smart managed 16 Port Gigabit / 16x LAN / 4x SFP / Lüfterlos / 19" / "ALL-SG8420M"
133577	ALLNET Switch smart managed 16 Port Gigabit 265W / 16x PoE+ / 2x SFP / Lüfterlos / 19" / "ALL-SG8318PM"
139327	ALLNET Switch smart managed 24 Port Gigabit 390W / 24x PoE+ / 4x SFP / 19" / "ALL-SG8428PM"
127211	ALLNET Switch smart managed 24 Port Gigabit / 24x LAN / 4x SFP / Lüfterlos / 19" / "ALL-SG8428M"
130253	ALLNET Switch smart managed 48 Port Gigabit / 48x LAN / 4x SFP / Lüfterlos / 19" / "ALL-SG8452M"



# **ALL4765-INDU SFP**

## **1000Mbit, RJ45(TP), Copper SFP Transceiver**

### **Industrie -40 – +85 Grad**

#### **1.PRODUCT FEATURES**

- Up to 1.25 Gb/s bi-directional data links
- Hot-pluggable SFP footprint
- Low power dissipation(1.05W typical)
- Compact RJ-45 connector assembly
- Fully metal enclosure, for lower EMI
- RoHS compliant and lead-free
- Single +3.3V power supply
- 10/100/1000 BASE-T operation in host systems with 1000BASE-X interface
- 1.25 Gigabit Ethernet over Cat 5 cable

#### **2.PRODUCT DESCRIPTION**

**ALL4765-INDU** Copper Small Form Pluggable (SFP) transceivers are based on the SFP Multi Source Agreement (MSA) . They are compatible with the Gigabit Ethernet and 10/100/1000BASE-T standards as specified in IEEE Std 802.3 .

**[www.allnet.de](http://www.allnet.de)**

ALLNET GmbH - Maistraße 2 - 82110 Germering - [sales@allnet.de](mailto:sales@allnet.de) - 089 / 894 222 22 Irrtümer und Änderungen vorbehalten



WT-SFP-T-AUTO-SERDES uses the SFP's RX\_LOS pin for link indication. If pull up SFP's TX\_DISABLE pin, PHY IC be reset.

Product part Number	Link Indicator on RX_LOS Pin	Support 10/100/1000base-T	Support SERDES
SFP-T-AUTO-SERDES	Yes	Yes	Yes

### 3.PRODUCT SELECTION

### 4.SFP to Host Connector Pin Out

Pin	Symbol	Name/Description	Ref.
1	VEET	Transmitter Ground (Common with Receiver Ground)	1
2	TFAULT	Transmitter Fault. Not supported.	
3	TDIS	Transmitter Disable. Laser output disabled on high or open.	2
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	3
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	3
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	3
7	Rate Select	No connection required	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	
9	VEER	Receiver Ground (Common with Transmitter Ground)	1
10	VEER	Receiver Ground (Common with Transmitter Ground)	1
11	VEER	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	

**[www.allnet.de](http://www.allnet.de)**

ALLNET GmbH - Maistraße 2 - 82110 Germering - sales@allnet.de - 089 / 894 222 22 Irrtümer und Änderungen vorbehalten



14	VEER	Receiver Ground (Common with Transmitter Ground)	1
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEET	Transmitter Ground (Common with Receiver Ground)	1

Notes:

1. Circuit ground is connected to chassis ground
2. PHY disabled on  $T_{DJS} > 2.0V$  or open, enabled on  $T_{DJS} < 0.8V$
3. Should be pulled up with 4.7k - 10k Ohms on host board to a voltage between 2.0 V and 3.6 V.  
MOD\_DEF(0) pulls line low to indicate module is plugged in.

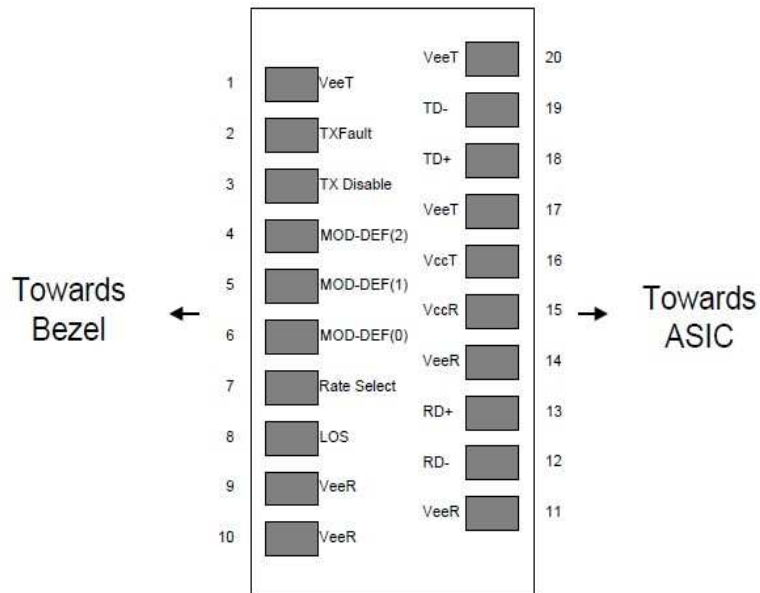


Figure 1. Diagram of host board connector block pin numbers and names

[www.allnet.de](http://www.allnet.de)

ALLNET GmbH - Maistraße 2 - 82110 Germering - sales@allnet.de - 089 / 894 222 22 Irrtümer und Änderungen vorbehalten



## 5. +3.3V Volt Electrical Power Interface

The SFP-T -AUTO has an input voltage range of 3.3 V +/- 5%. The 4V maximum voltage is not allowed for continuous operation.

+3.3 Volt Electrical Power Interface						
Parameter	Symbol	Min	Typ	Max	unit	Notes/Conditions
Supply Current	I <sub>s</sub>		320	375	mA	1.2W max power over full range of voltage and temperature. See caution note below
Input Voltage	V <sub>cc</sub>	3.13	3.3	3.47	V	Referenced to GND
Maximum Voltage	V <sub>max</sub>			4	V	
Surge Current	I <sub>surge</sub>			30	mA	Hot plug above steady state current. See caution note below

## 6. Low-Speed Signals

MOD\_DEF(1) (SCL) and MOD\_DEF(2) (SDA), are open drain CMOS signals (see section VII, "Serial Communication Protocol"). Both MOD\_DEF(1) and MOD\_DEF(2) must be pulled up to host\_Vcc

Low-Speed Signals, Electronic Characteristics					
Parameter	Symbol	Min	Max	unit	Notes/Conditions
SFP Output LOW	VOL	0	0.5	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
SFP Output HIGH	VOH	host_Vcc - 0.5	host_Vcc + 0.3	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
SFP Input LOW	VIL	0	0.8	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector
SFP Input HIGH	VIH	2	Vcc + 0.3	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector

## 7. High-Speed Electrical Interface

All high-speed signals are AC-coupled internally.

**www.allnet.de**

ALLNET GmbH - Maistraße 2 - 82110 Germering - sales@allnet.de - 089 / 894 222 22 Irrtümer und Änderungen vorbehalten



High-Speed Electrical Interface, Transmission Line-SFP						
Parameter	Symbol	Min	Typ	Max	unit	Notes/Conditions
Line Frequency	fL		125		MHz	5-level encoding, per IEEE 802.3
Tx Output Impedance	Zout,TX		100		Ohm	Differential, for all frequencies between 1MHz and 125MHz
Rx Input Impedance	Zin,RX		100		Ohm	Differential, for all frequencies between 1MHz and 125MHz

High-Speed Electrical Interface, Host-SFP						
Parameter	Symbol	Min	Typ	Max	unit	Notes/Conditions
Single ended data input swing	Vinsing	250		1200	mV	Single ended
Single ended data output swing	Voutsing	350		800	mV	Single ended
Rise/Fall Time	Tr,Tf		175		psec	20%-80%
Tx Input Impedance	Zin		50		Ohm	Single ended
Rx Output Impedance	Zout		50		Ohm	Single ended

## 8. General Specifications

General						
Parameter	Symbol	Min	Typ	Max	unit	Notes/Conditions
Data Rate	BR	10		1000	Mb/sec	IEEE 802.3 compatible. See Notes 2 through 4 below
Cable Length	L			100	m	Category 5 UTP. BER

**www.allnet.de**

ALLNET GmbH - Maistraße 2 - 82110 Germering - sales@allnet.de - 089 / 894 222 22 Irrtümer und Änderungen vorbehalten



**Notes:**

1. Clock tolerance is +/- 50 ppm
2. By default, the SFP-T-AUTO-SERDES is a full duplex device in preferred master mode
3. Automatic crossover detection is enabled. External crossover cable is not required

## 9.Environmental Specifications

Environmental Specifications						
Parameter	Symbol	Min	Typ	Max	unit	Notes/Conditions
Operating Temperature	Top	0		70	°C	Case temperature
Operating Temperature	Top	-40		85	°C	Case temperature
Storage Temperature	Tsto	-40		85	°C	Ambient temperature

## 10. Serial Communication Protocol

Serial Bus Timing, Requirements						
Parameter	Symbol	Min	Typ	Max	unit	Notes/Conditions
I <sup>2</sup> C Clock Rate		0		200,000	Hz	

All SFPs support the 2-wire serial communication protocol outlined in the SFP MSA.


These SFPs use an MCU, can be accessed with address of A0h.

**[www.allnet.de](http://www.allnet.de)**

ALLNET GmbH - Maistraße 2 - 82110 Germering - sales@allnet.de - 089 / 894 222 22 Irrtümer und Änderungen vorbehalten



## 11. Outline Dimensions (mm)

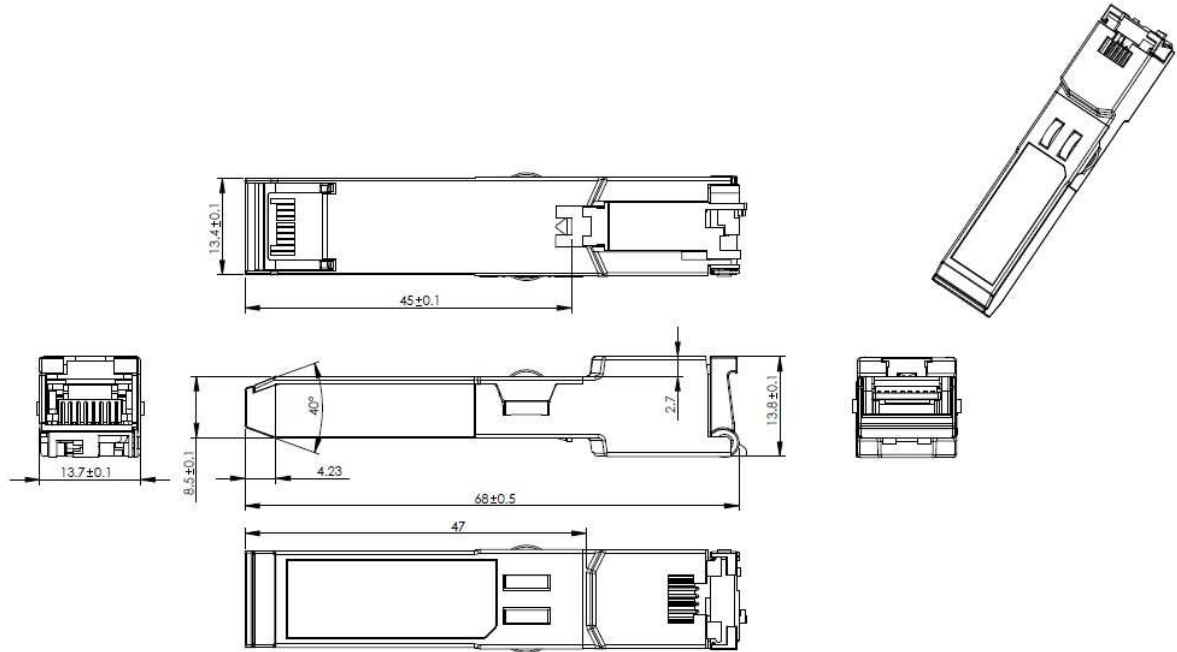

[www.allnet.de](http://www.allnet.de)

ALLNET GmbH - Maistraße 2 - 82110 Germering - sales@allnet.de - 089 / 894 222 22 Irrtümer und Änderungen vorbehalten