


PIN OUT

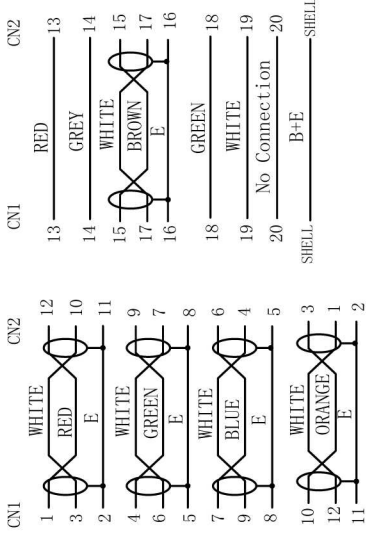

- NOTE:
- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance: DC 200V 10MΩ MIN;
 - Contactor resistance: 5Ω MAX;

- RoHS & Reach Compliant.
- PRINT WORD: DisplayPort Cable AWM STYLE 20276 80°C 30V VW-1
- Display Port 1.4 Version

MATERIAL LIST:

⑤	PLASTIC HOOD	COLOR/BLACK	2	REMARK
④	OUTER MOLD	PVC 88A COLOR:BLACK	2	
③	INNER MOLD	LD-PE NATURE IN COLOR	2	
②	CONNECTOR	DisplayPort 20P/Male, The pin Gold plated, The shell Nickel plated	2	
①	CABLE	DP 1.4V 30AWG (1/0.254BC*2C+E+AL+HM)*5+1/0.254BC*4C+AEB E=1/0.254BC B=0.12mm/9*16 AL-MG JACKER:PVC/BLACK OD:6.0 ± 0.2mm	1	
NO.	PARTS. NAME	SPECIFICATION STANDARD	QT'Y	REMARK

Item No.	Length
K5567SW.0.5	500 ± 15mm
K5567SW.1	1000 ± 20mm
K5567SW.1.5	1500 ± 20mm
K5567SW.1.8	1800 ± 25mm
K5567SW.2	2000 ± 30mm

CUSTOMER'S ITEM	CUSTOMER
DRAWING	TITLE
UNIT	mm
DRAWN BY	CHECK BY
Zhouqinghua	APPRO BY
	DATE
	2019/12/20

