

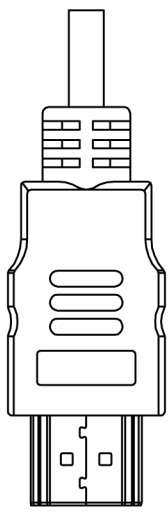


REV. A0	REVISED DESCRIPTION FIRST RELEASE	DATE 2019/11/23	CHECKED
---------	--------------------------------------	--------------------	---------

Length

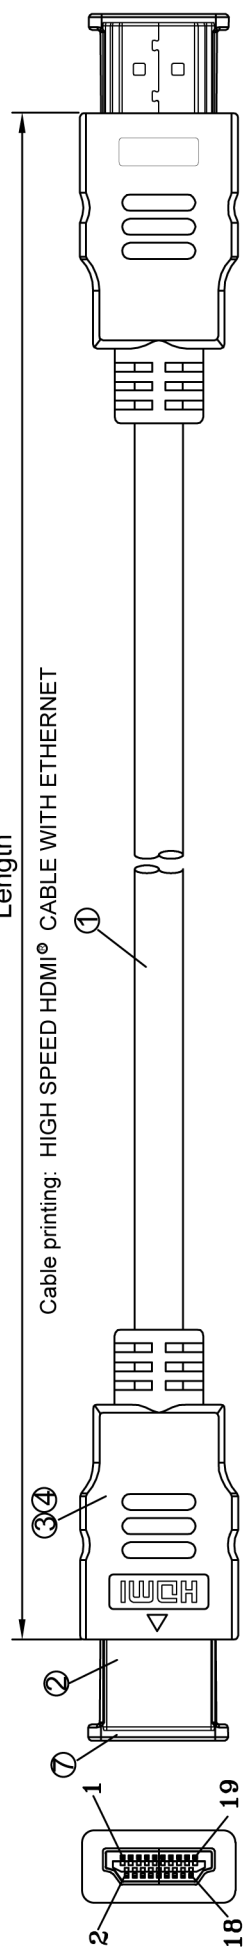

Signal Assignment

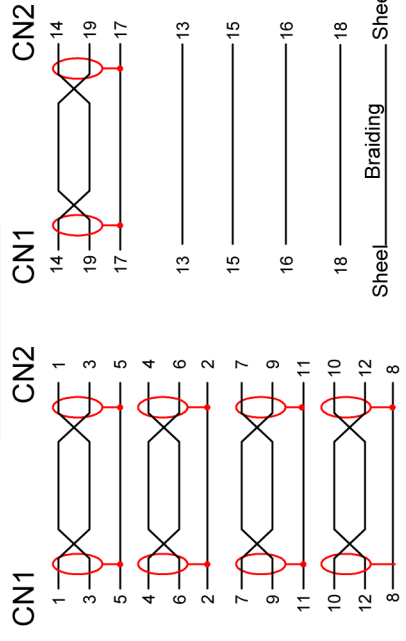


Remark:

- 100% Open/Short Test
- Conductive Resistance:15ohms MAX
- Insulation Resistance:5M ohm MIN.
- HI-POT:DC 300V/10MS.
- The product is Reach/RoHS 2.0 compliant.
- Support 4K*2K@60Hz

Item NO.	Length
K5431SW.0.5	0.5m
K5431SW.1	1.0m
K5431SW.2	2.0m
K5431SW.3	3.0m

Cable Spec.

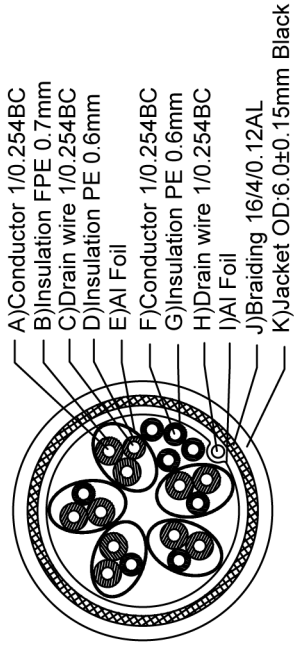

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	HDMI Protective Cap, PE	2PCS	
④	External Mold	2PCS	
③	Inner Mold	2PCS	
②	Connector	2PCS	
①	Cable		
	30AWG 2.0V (19+1BC) 64ALB HDMI Cable OD:6.0mm (0.254BC+FFE)*IP+D+AL] *5C + (0.254BC+HDPE)*4C + AL + D + 64ALB PVCOD:6.0mm		

ERP NO.:	SAMPLE DWG NO.:
DOC No.:	REVISION A0
CUSTOMER:	UNIT mm
CUSTOMER P/N:	SCALE NO
DESCRIPTION	PAGE NO 1/1
APPROVAL	DATE 2019/11/23
CHECKED	DRAWN

TOLERANCES UNLESS OTHERWISE STATED
 X = ±0.1
 XX = ±0.2
 XXX = ±0.5