

## ALLNET IP Kamera Fix Dome Outdoor / 5MP / IR / Vandalismus /

>>> Al artículo de la tienda



### EAN CODE



## ALLNET IP Camera Fix Dome Outdoor / 5MP / IR / Vandalism / Low- Light / 79° / "ALL-CAM2488v3-LVEN"


### Highlights:

- High quality image with 5MP, 1/2.7"CMOS sensor
- 5MP (2880\*1620)@ 30/25fps; 4MP (2560\*1440)@ 30/25fps; 3MP (2304\*1296) @30/25fps; 2MP (1920\*1080) @30/25fps
- Ultra 265, H.265, H.264, MJPEG
- LightHunter technology ensures ultra-high image quality in low illumination environment
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Alarm:1 in/1 out, Audio: 1 in/1 out
- Smart IR, up to 30m (98ft) IR distance
- Supports 256 G Micro SD card
- IK10 vandal resistant
- IP67 protection
- Support PoE power supply

## Key Features



## Dimensions

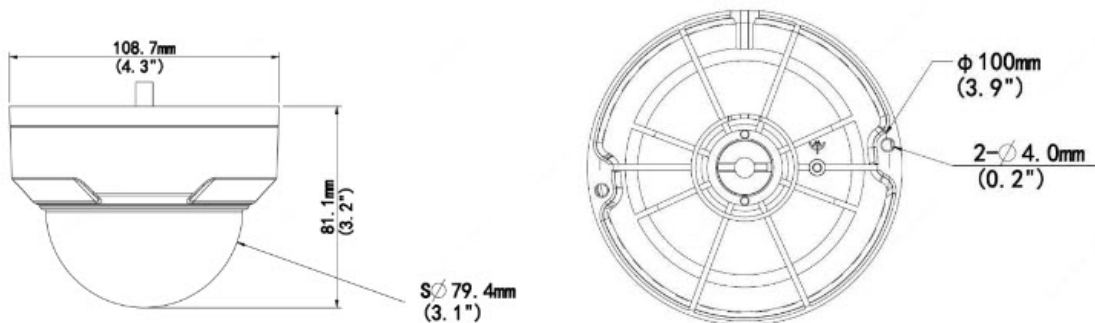

## Technical Details:

ALL-CAM2488v3-LVEN					
Camera					
Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS				
Lens	4.0mm@F1.6				
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	4.0	90.0	36.0	18.0	9.0
Angle of View (H)	78.7°				
Angle of View (V)	44.9°				
Angle of View (O)	89.2°				
Adjustment angle	Pan: 3° ~ 360°		Tilt: 0° ~ 68°		Rotate: 3° ~ 360°
Shutter	Auto/Manual, 1 ~ 1/100000s				
Minimum Illumination	Colour:0.003 Lux (F1.6, AGC ON) 0Lux with IR				
Day/Night	IR-cut filter with auto switch (ICR)				



Número de artículo: 207723  
 Número de fabricante: ALL-CAM2488v3-LVEN

Digital Noise Reduction	2D/3D DNR
S/N	>56dB
IR Range	Up to 30m (98ft) IR range
Wavelength	850nm
IR On/Off Control	Auto/Manual
Defog	Digital Defog
WDR	120dB
Video	
Video Compression	Ultra 265, H.265, H.264, MJPEG
H.264 code profile	Baseline profile, Main profile, High profile
Frame Rate	Main Stream:5MP (2880*1620), Max 30fps; 4MP (2560*1440), Max 30fps; 3MP (2304*1296), Max 30fps; 1080P (1920*1080), Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps; Third Stream: D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps;
Video Bit Rate	128 Kbps~16 Mbps
OSD	Up to 8 OSDs
Privacy Mask	Up to 4 areas
ROI	Up to 8 areas
Motion Detection	Up to 4 areas
Image	
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2
Digital Noise Reduction	2D/3D DNR
Smart IR	Support
Flip	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise
Dewarping	N/A
HLC	Supported
BLC	Supported
Audio	
Audio Compression	G.711
Two-way audio	Supported



Número de artículo: 207723  
 Número de fabricante: ALL-CAM2488v3-LVEN

Suppression	Supported
Sampling Rate	8KHZ
Storage	
Edge Storage	Micro SD, up to 256GB
Network Storage	ANR
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
Client	EZStation EZView EZLive
Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
	Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+, Safari 11+
Interface	
Audio I/O	Input: impedance 35k $\Omega$ ; amplitude 2V [p-p]
	Output: impedance 600 $\Omega$ ; amplitude 2V [p-p]
Alarm I/O	1/1
Network	1 RJ45 10M/100M Base-TX Ethernet
Certifications	
Certifications	CE: EN 60950-1 UL: UL60950-1 FCC: FCC Part 15
General	
Power	DC 12V $\pm$ 25%, PoE (IEEE 802.3af)
	Power consumption: Max 4.5W
Dimensions ( $\varnothing$ x H)	?108.7 x 81.1mm ( $\varnothing$ 4.3" x 3.2")
Net Weight	0.425kg (0.93lb)
Material	Metal + Plastic
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ?95% RH (non-condensing)
Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ?95% RH (non-condensing)
Surge Protection	2KV
Ingress	IP67

Protection	
Vandal Resistant	IK10
Reset Button	N/A

## Accesorios

Número de artículo	Denominación
159707	ALLNET ALL-CAM2488-LVEN Caja de conexiones
159708	ALLNET ALL-CAM2488-LVEN Soporte de pared con caja
99305	ALLNET ALL951000 Protector contra rayos Cat 6
186548	ALLNET ALL0488v6 Inyector PoE Gigabit PoE & PoE+ (15.4W/30W)
112270	ALLNET ALL048900V2 Inyector PoE Gigabit AT++ 90W
113046	ALLNET ALL048605PD Switch 5x Gigabit, LT-PoE
99315	ALLNET ALL8804PoE+ Switch 8x Gigabit HPoE, 2x PoE+ o 4x PoE
93392	ALLNET ALL8808POE Switch 8x Gigabit HPoE, 4x PoE+ o 8x PoE
193997	ALLNET ALL-SG8610PM Switch gestionable 8x Gigabit 130W / 2x SFP / 8x PoE+
194025	ALLNET ALL-SG8626PM Switch gestionable 24x Gigabit 390W / 4x SFP / 24x PoE+
200625	ALLNET Videoserver NVR Box mit Networkoptix Server, RK3399, 2GB, ALL2288
124355	Networkoptix Software de gestión de vídeo IP, 1 canal
162926	Networkoptix IP Nx-Professional Videomanagment Software 4 Kanal "X86-Platform"
162927	Networkoptix IP Nx-Professional Videomanagment Software 8 Kanal "x86 Platform"
146999	ALLNET PoE USV Backup - USV für Kameras, Accesspoints ALL900

[Haga clic aquí para descubrir más artículos de esta categoría en nuestra tienda.](#)