

ALLNET ALL0235NANO / Wireless N 150Mbit USB Stick



EAN CODE



Highlights:

- Supports 64/128bit WEP, WPA-PSK /WPA2-PSK and WPA/WAP2 encryption methods
- Supports :IEEE 802.11g,IEEE 802.11b,IEEE 802.11n standards
- 20MHz/40MHz bandwidth
- Supports two operation modes: Ad-Hoc and Infrastructure modes
- Automatically detect network status and transmission rate

This mini profile WLAN adapter supporting IEEE 802.11b/g/n standards with USB Connector supporting USB2.0/1.1 interface.


It is a highly integrated MAC/BBP and 2.4GHz RF/PA.LAN single chip with 150Mbps PHY rate supporting,it comes with IEEE802.11N feature rich wireless connectivity at high standards,dilivers reliable,throughput from an extended distance, giving end users the greatest performance anytime in any circumstance, Application for IP camera,IP TV,GPS,dreambox,Raspberry Pi, Banana PI and other network device

Technical Details:

Elements	Specifications
Chipset:	RALINK/Mediatek MT7601
WiFi Standards:	IEEE 802.11b/g IEEE 802.11n
Rates:	IEEE 802.11b: 1, 2, 5.5 and 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n: bis zu 150Mbps

Quality of Service (QoS) /Value-Added MAC Features:	IEEE 802.11e QoS Wi-Fi Alliance WMM (Wi-Fi Multimedia Enhancement)
Connector:	USB 2.0/1.1 Type A
Security:	64/128-Bit WEP WPA-PSK WPA2-PSK 802.11i
Supported OS:	Raspberry Pi (Linux) Banana Pi (Linux) Windows XP 32bit Windows Vista 32/64bit Windows 7/8/10 32/64bit Linux MAC OS
Housing:	PVC with Metal (USB-Connector)
Dimension:	(18) x 14 x 5mm Weight: ca. 3 gramm (without Packaging)
Marks:	CE

Images supplémentaires

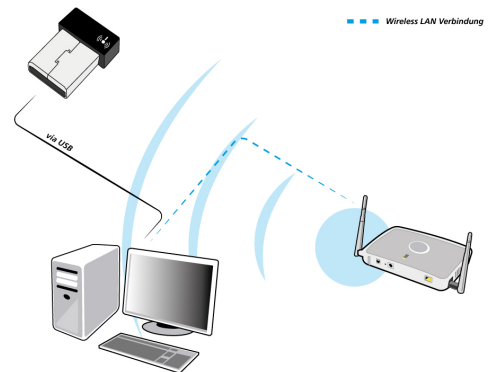

Accessoires

No. d'article Désignation



No. d'article: 111798
Numéro de fabricant: ALL-WA0150N

86446

ALLNET ALL0235MINI / Wireless N 150Mbit Routeur/Point d'accès