



Synergy 21 Tira LED Flex DC12V/48W, blanco neutro, IP68, 5m

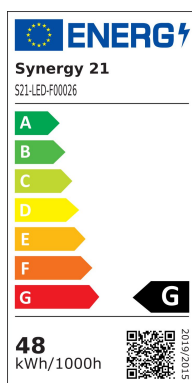

kwh/1000h:	48,00
Lúmenes:	3600
Vatio:	48,0
Vida útil nominal:	35000 Std.
Ciclos de conmutación:	50000
Temperatura ambiente óptima:	25 °C

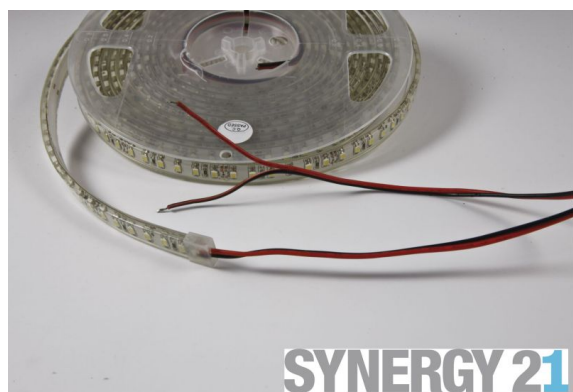

Características técnicas:

- Alimentación: DC12V/4A/48W
- Temperatura termodinámica: 4500K
- Número de LEDs: 600 SMD3528
- Flujo luminoso: 3600lm
- Ángulo de enfoque: 120°
- No incluye cinta autoadhesiva 3M
- Protección: IP68

Atributos

Atributo	Valor
Abstrahlwinkel:	120
Ampere:	4
CC oder CV:	CV
CRI:	>80
Dimmbar:	abhängig vom Netzteil
EPREL_ANTI_GLARE_SHIELD:	false

Atributo	Valor
EPREL_BEAM_ANGLE:	Not applicable
EPREL_BEAM_ANGLE_CORRESPONDENCE:	SPHERE_360
EPREL_CAP_TYPE:	/
EPREL_CHROMATICITY_COORD_X:	0.381
EPREL_CHROMATICITY_COORD_Y:	0.388
EPREL_CLAIM_EQUIVALENT_POWER:	false
EPREL_COLOUR_RENDERING_INDEX:	93.1
EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE:	false
EPREL_CONNECTED_LIGHT_SOURCE:	false
EPREL_CORRELATED_COLOUR_TEMP_TYPE:	RANGE
EPREL_DIMENSION_DEPTH:	500
EPREL_DIMENSION_HEIGHT:	5
EPREL_DIMENSION_WIDTH:	11
EPREL_DIMMABLE:	NO
EPREL_DIRECTIONAL:	NDLS
EPREL_ENERGY_CLASS:	F
EPREL_ENERGY_CONS_ON_MODE:	4
EPREL_ENVELOPE:	NO
EPREL_EQUIVALENT_POWER:	Not applicable
EPREL_HIGH_LUMINANCE_LIGHT_SOURCE:	false
EPREL_LIGHTING_TECHNOLOGY:	LED
EPREL_LUMEN_MAINTENANCE_FACTOR:	0.98
EPREL_LUMINOUS_FLUX:	478
EPREL_MAINS:	NMLS
EPREL_MAX_BEAM_ANGLE:	Not applicable
EPREL_MAX_COLOUR_RENDERING_INDEX:	95
EPREL_MIN_BEAM_ANGLE:	Not applicable
EPREL_MIN_COLOUR_RENDERING_INDEX:	92
EPREL_POWER_ON_MODE:	5.9
EPREL_POWER_STANDBY:	0.00
EPREL_R9_COLOUR_RENDERING_INDEX:	67

Atributo	Valor
EPREL_REGISTRANT_NATURE:	MANUFACTURER
EPREL_SURVIVAL_FACTOR:	1.00
Länge:	5
LED Strip Klebeband:	ja
LED Strip Breite:	11
LED Strip Höhe:	5
LED Strip Klebeband:	ja
LED Strip kürzbar:	25
LED Strip Länge:	5000
Lichtfabe in Kelvin:	4500
Lichtfarbe:	neutralweiß
Lichtfarbe in Kelvin:	4500
Lichtfarbe Name:	neutralweiß
Lumen:	3600
Schutzklasse:	IP68
Volt:	12
Peso:	0.3 Kg
Garantía:	24.00 Meses

Imágenes adicionales



Accesorios

Número de artículo	Denominación
81069	Synergy 21 Enchufe DC con borne de tornillo
81068	Synergy 21 Conector DC con borne de tornillo
81741	Synergy 21 Clip fijación de silicona para tiras LED, Pack de
78195	Synergy 21 Alimentación para tiras LED bicolor blanco de 60W
79612	Synergy 21 Alimentación universal de 60W / 12V
98273	Synergy 21 LED Flex Strip zub. Testklemmen für Single Color
148726	Synergy 21 Outdoor Kabelverbinder IP68 1:1
148727	Synergy 21 Outdoor Kabelverbinder IP66 1:2
148730	Synergy 21 Outdoor Kabelverbinder IP66 Box 3 Ports
148729	Synergy 21 Outdoor Kabelverbinder IP68 Box 3 Ports transparent
148728	Synergy 21 Netzteil - Wasserdichte Verbinder Box 4 Ports
139522	Mean Well LPV-150-12 Alimentación 12V/120W IP67
181661	Mean Well WPD-06 Dimmer EnOcean wireless PWM