


ALLNET SGC5410PM-10G Apollo Full Managed 10x / 8x 2,5GB

>>> [Al artículo de la tienda](#)

EAN CODE

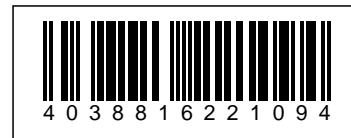



Destacados:

- 8x 2.5GbE PoE
- 2x SFP+ 10G para Uplink
- Soporta PoE IEEE802.3af / at con 30W max. 30W por puerto
- PoE Budget 240W
- Soporta Jumbo Frames
- Soporta IGMP snooping v1/v2/v3
- Soporta Link aggregation
- Soporta Loop protection
- Soporta Spaning Tree Protocoll (STP) y Rapid Spanning Tree (RSTP)
- **Funciona como switch independiente o con el controlador Apollo (véase ALL-AC100)**

Cada vez hay más aplicaciones que necesitan un conmutador Ethernet más rápido. Los switches MultiG de ALLNET Apollo admiten AP Wi-Fi 6/6E/7 más rápidos, aceleran la carga y descarga de archivos grandes, hacen que las videoconferencias sean más fluidas y evitan las fluctuaciones.

Ecosistema de dispositivos 2.5G / 10G

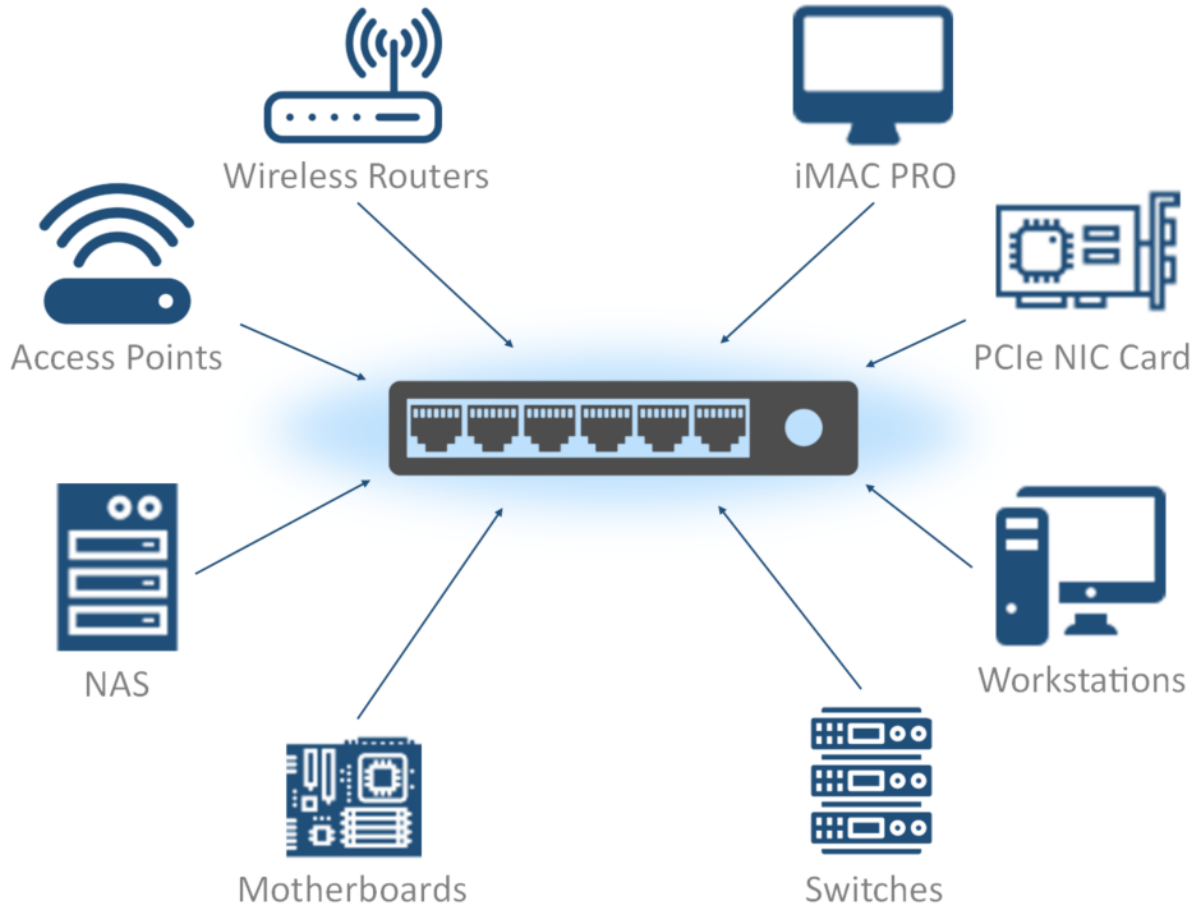

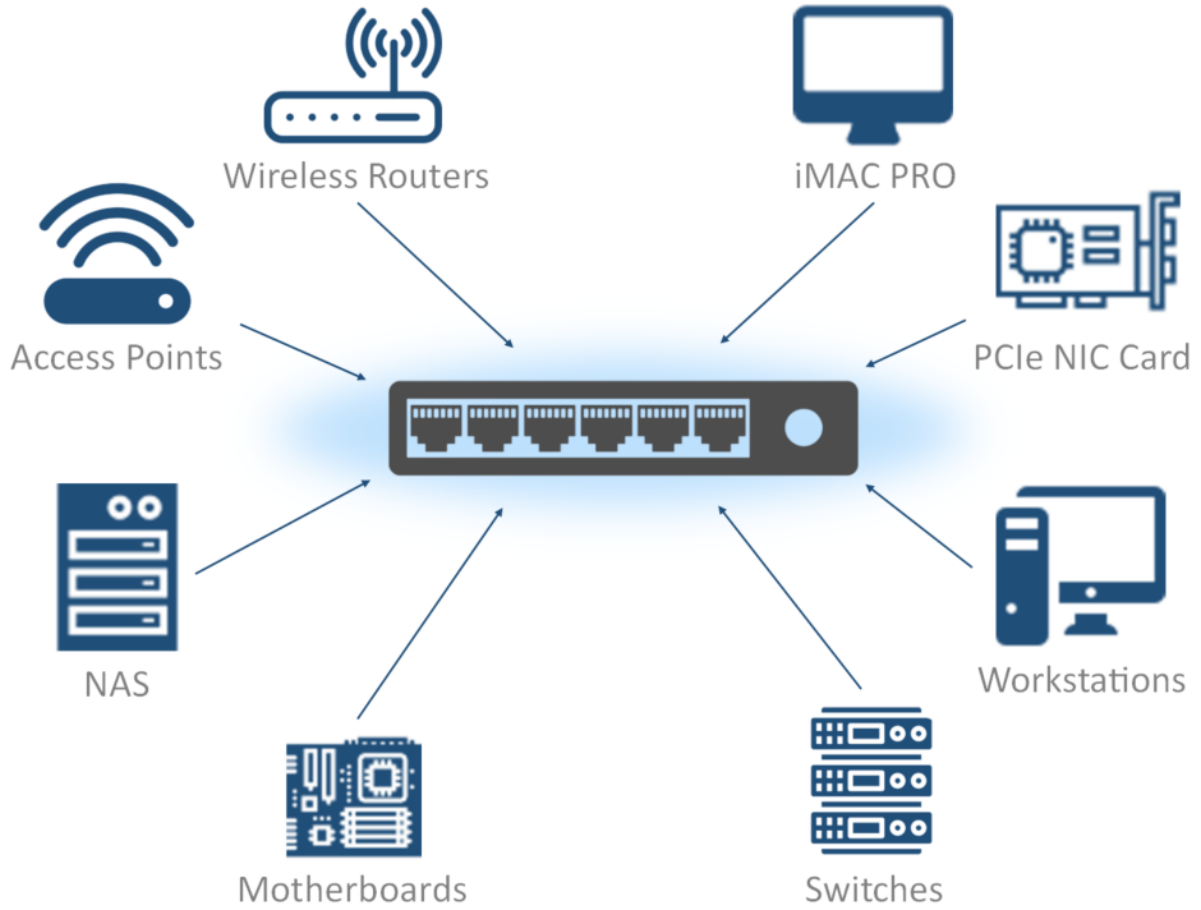

Aplicaciones

Multi-GE






Interfaz de acceso Multi-GE

El ancho de banda de enlace ascendente de los AP WLAN ha aumentado de 2,5 Gbps en 802.11ac a 5 Gbps o 10 Gbps. El acceso gigabit tradicional no puede satisfacer los requisitos de ancho de banda de enlace ascendente de los AP. Los switches Multi-GE de Emplus los puertos soportan 100M*/1/2.5Gbps incluso 5G/10Gbps (serie SMX) auto-sensing, cumpliendo con los requisitos de ancho de banda de los APs inalámbricos de alta velocidad en la era Wi-Fi 6. En respuesta al estándar Wi-Fi de próxima generación (Wi-Fi 7), la familia de conmutadores Multi-GE de Emplus con funciones Wi-Fi 7 estará disponible próximamente.

Puertos de conmutación Multi-GE con autonegociación de velocidades de 100 Mbps, 1 Gbps, 2,5 Gbps y 5 Gbps en el cable Cat5e existente, y hasta velocidades de 10 Gbps en el cableado Cat6a más reciente (tabla inferior).

Cable	1 G	2.5G	5 G	10G
Cat5e	•	•	•	N/A
Cat6	•	•	•	• (55m)
Cat6a	•	•	•	•

*100Mbps does not support half-duplex mode

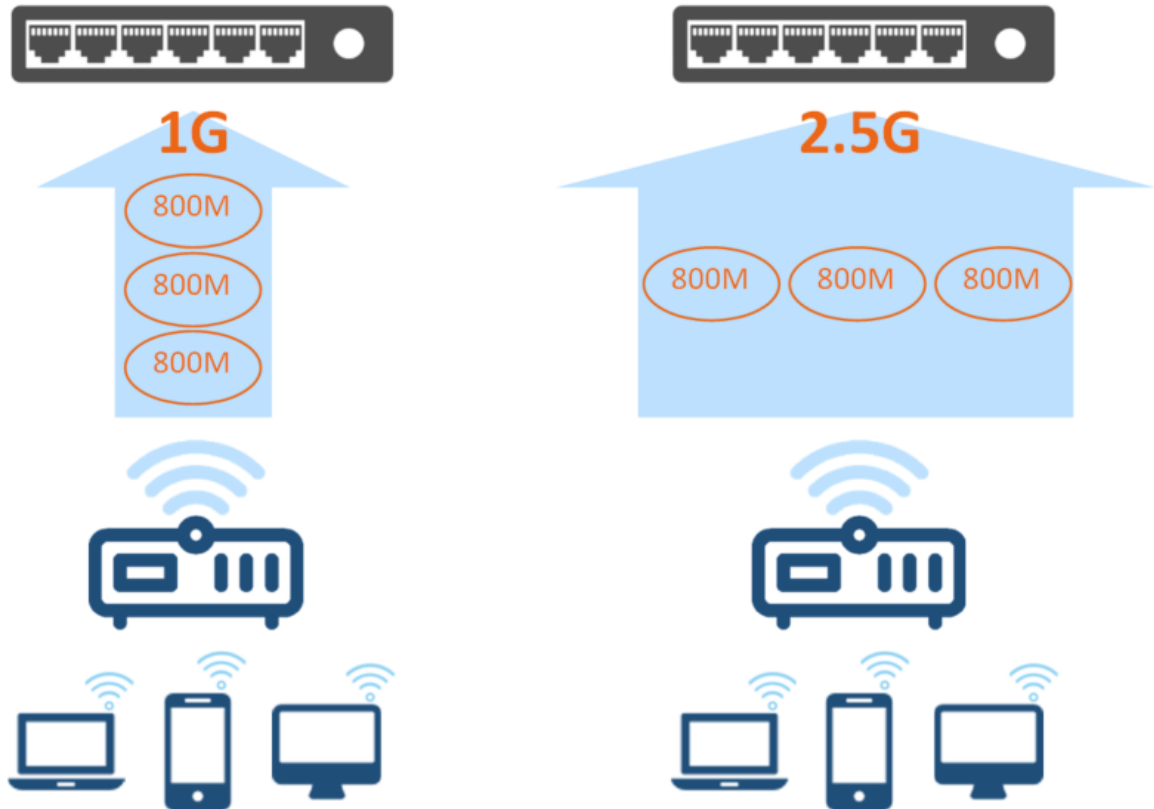

Spanning Tree Protocol (STP)

Admite el protocolo estándar IEEE 802.1D STP, IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) para una convergencia más rápida.

Loop protection

Si el conmutador detecta un bucle, desactiva el puerto de origen para que no reenvíe paquetes de datos originados en el conmutador para evitar tormentas de difusión.

Jumbo frame support

Admite un tamaño de trama de hasta 10K bytes para mejorar el rendimiento de las transferencias de datos de gran tamaño.

IGMP snooping v1/v2/v3

Mejora el rendimiento de la red mediante el filtrado de multidifusión, en lugar de inundar el tráfico en todos los puertos.



Link aggregation

Agrupar varios puertos hasta un máximo de ocho (8) puertos por troncal de forma automática mediante el protocolo de control de agregación de enlaces (LACP).

Software Features - Apollo

System Information
System Name
System Location
System Contact
System System Features
IPv4 Settings -IP address / Subnet mask -DHCPv4
IPv6 Settings -Global address -Link-local address -DHCPv6
Domain Name System (DNS) -IPv4 (Support 4 Servers)
Port
Port Configuration -Speed configuration -Flow control (802.3x, back pressure) -Port description (support 128 bytes) -Port extend mode
IEEE 802.3az Energy Efficient Ethernet (EEE)
L2
MAC Address Table -MAC address table (16K) -Age Time -Static MAC address
Jumbo Frame -Per-Port/Per-system (9216 bytes)
Spanning Tree -802.1w rapid spanning tree -802.1s multiple spanning tree -MSTP instance (16 instances) -Per device BPDU forward -Per port BPDU forward -Per port BPDU Filter -Per port BPDU Guard



- Per port Root Guard
- Edge port mode
- Point to Point mode
- Per port admin state

L2

Loopback detection
-STP independent + port base shutdown only

Multicast Filtering
-Unknown Multicast Drop (unregistered multicast filtering)
-Unknown Action-Drop/Flood/Router Port

Multicast Group
-Support Max. multicast group (256 groups)

IGMP Multicast Forwarding
-MAC Group Address FDB

IGMP Snooping
-Support v1, v2, v3 awareness
-IGMP snooping fast leave (per-vlan)
-IGMP querier
-Dynamic router port
-Static/Forbidden router

MLD Multicast Forwarding
-MAC Group Address FDB
-IP Group Address FDB

MLD Snooping
-Support v1
-MLD snooping fast leave (per-vlan)
-MLD querier
-Dynamic router port
-Static/forbidden router

802.3ad Link Aggregation
-Static Trunk
Max. 8 ports/group
Max. 8 groups per device
-Dynamic Trunk (LACP)
Max. 8 ports/group
Max. 8 groups per device
-Load Balance Algorithm (source/destination MAC, VLAN, EtherType, source/destination IP address, TCP/UDP ports)
-LA description

802.1ab Link Layer Discovery Protocol (LLDP)



EOAM -SFP information, SFP+ DDM -Cable diagnostic -Port statistics
DHCP
IPv4 DHCP Relay -DHCP Relay -Max. IPv4 DHCP servers -Option82 Status -Option82 Strategy (Keep/Replace/Drop)
IPv4 DHCP Snooping -DHCP Snooping -Binding list -Statistics
VLAN
802.1Q Support
VLAN Group -VID from 1-4094 (Max. 256 VLAN groups)
GVRP -Dynamic VLAN groups -Per port / device enable / disable -VLAN advertisement
Voice VLAN
L3 Interface
Multiple IP Interface -Max. 4 IP interfaces -Max. 4 Ip v4 address -20 IPv6 address (shared for both link local and global address)
ARP Table -Max. 192 ARP entries
Static ARP -Static 192 ARP entries (Share with ARP Table)
ARP Age Time
IPv6 Neighbor Discovery Table -Max. 42 ND entries
Static IPv6 Neighbor Discovery -Static 42 ND entries (Share with IPv6 Neighbor Discovery Table)
L3 Routing
IPv4 Static Route and Default Route -Max. 63 entries



IPv4 Default Route -Max. 1 entry
IPv4 Route Table
IPv6 Static Route -Max. 21 entries
IPv6 Default Route -Max. 1 entry
IPv6 Route Table
Interface specific select -Per VLAN
RIP
OSPF
L3 IP Multicast
IGMP -IP group address FDB
MLD -IP group address FDB
QoS
Trust Mode -Cos/802.1p -DSCP -CoS/802.1p-DSCP
Per Port Trust Mode -Enable-follow the global trust type -Disable-Always go to the lowest priority queue.
Queue -Number of priority queues supported-8
CoS Mapping
CoS Based on 802.1p Priority
CoS Based on Physical Port
CoS Based on DSCP/TOS
Scheduling Mechanism -Strict/WRR/Strict + WRR
Queue Weight Bandwidth
Bandwidth Control -Rate limit according to network speed 16kbps~1000Mbps-in step of 16kbps
Advanced QoS



Security
802.1X Authentication Protocol -Local/RADIUS/TACACS+
802.1X Port-based Access Control
802.1X Authenticated Hosts
802.1X Guest VLAN
RADIUS-VLAN assignment
EAP/RADIUS of Port Statistics
Port Security (Limited Dynamic Lock)
Storm Control -Support broadcast/unknown multicast/unknown unicast 16kbps~1000Mbps - in step of 16kbps
Port Isolation (Protected Ports)
DOS Attack Prevention
Access Control List (ACL) -Ingress/Egress -MC Based ACL -IPv4 Based ACL -IPv6 Based ACL -MAC Range Mode -IP Range Profile -ACL Binding -Action-Permit/Deny/Shutdown/Rate Limit
Management VLAN
Radius Server -IPv4 / IPv6 / hostname(IPv4)
AAA
Login Authentication List -Local -Telnet/HTTP
Security Password -Requires a user to generate a new means of authentication before access is granted to the device for the first time.
PoE management -Power on/off per port -Power class configuration (autoclass/userdefine) -Power feeding with priority -Power budget limit
PD LifeGuard
Account Manager -Multi Privileges
Web Graphical User Interface (GUI)



-HTTP IPv4 / IPv6 -HTTPS IPv4 / IPv6
Web support multi-language -Language support
SNMP v1/v2/v3 Support
RMON 1, 2, 3, 9 -Support 4 groups of RMON (1-statistics, 2-history, 3-alarms, 9-events)
SSH Server -IPv4/IPv6

AAA
Telnet Server -IPv4/IPv6
TFTP Client -IPv4/IPv6
Port Mirroring -Support 1 to 1 and many to 1 -Max. mirroring session-3 -Tx/Rx/both mirroring
Dual Images
Image upgrade/backup -Firmware upgrade (TFTP/HTTP)
Configuration upgrade/backup -TFTP/HTTP
Configuration Saving -Manual/Auto Save
System Time -Time setting/daylight saving
Simple Network Time Protocol (SNTP) -IPv4/IPv6/hostname(IPv4) SNTP server -Daylight Savings Time -Port number for SNTP server
Web UI Supports Non-IE Browser -Chrome, Firefox, Safari
SYSLOG -Support log admin password/IP change activity enhancement -Local logging-buffered/flash -Remote logging-IPv4/IPv6/hostname(IPv4) -Originator Identifier-None/Hostname/Ipv4/Ipv6/User Defined
SYSLOG Backup -Buffered



Número de artículo: 221097
Número de fabricante: ALL-SGC5410PM-10G


Ping -IPv4/IPv6/hostname(IPv4)
Trace Route -IPv4/IPv6/hostname(IPv4)
Factory Default
Reboot Switch
Flick Reboot
MIB Support
MIB II -RFC1213
Bridge -RFC1493
RMON -RFC1757
802.1p -RFC2674
LLDP MIB -RFC2863
Pubic Mib From Cloud Agent -ReadOnly

Physical Interfaces

Multi GE PoE Switch
ALL-SGC5410PM-10G
330 x 44 x 230 mm



Número de artículo: 221097
Número de fabricante: ALL-SGC5410PM-10G

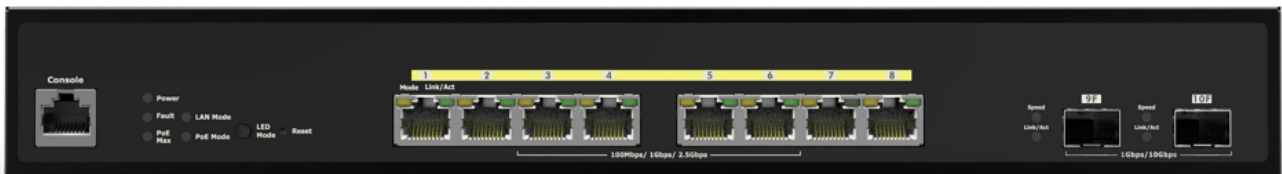

Technical Details:

Multi GE PoE Switch

	ALL-SGC5410PM-10G
Copper Ports	8x 2.5GbE
SFP Ports	-
SFP+ Ports	2x 10GbE
PoE Available Ports	8
PoE Standard	802.3af/at
PoE Power Budget	240W
Switch Chip	RTL9302C
PHY	GPY241
PoE Controller	RTL8238B
Flash Memory	16MB NOR 128MB NAND
SDRAM Memory	512MB DDR3
Packet Buffer	12Mbit
MAC Table Size	16K
Switching Capacity	80Gbps
Fan(s)	2
Power Supply	Int. PSU 300W
Dimensions (W x H x D)	330 x 44 x 230
Operating Temperature	0°C to 50°C

Atributos

Atributo	Valor
Anzahl Ports PoE/LAN:	8/0
Belüftung Switch:	Mit Lüfter
Einsatzort Switch:	19";
LAN Geschwindigkeit:	100 Mbit/s; 1Gbit/s; 2,5Gbit/s;
Management:	full managed; Apollo Series (Apollo Controller) ;
PoE Budget:	<300 Watt
PoE Port Leistung:	30W at



Número de artículo: 221097
Número de fabricante: ALL-SGC5410PM-10G

Atributo	Valor
SFP Geschwindigkeit:	SFP+ 10GBit;
Peso:	1 Kg
Garantía:	24.00 Meses

Accesorios

Número de artículo	Denominación
211733	ALLNET AC100 Controlador de red serie Apollo
211734	ALLNET Apollo Wireless AP WIFI6 • AX3000 • 2x2 • Indoor • 2.5 GbE • ALL-WAPC0522AX-3000 • Apollo
211736	ALLNET WAPC0544AX-5400 Punto de acceso Apollo WiFi 6 / AX5400
211739	ALLNET Apollo Wireless AP WIFI6 • AX3000 • 2x2 • Outdoor IP67 • 2.5 GbE • ALL-WAPC0522AXO-3000 • Apollo