
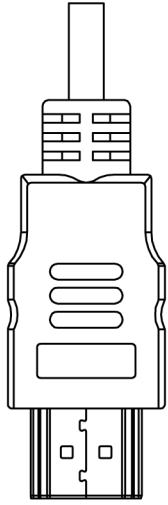


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/11/23	


Length

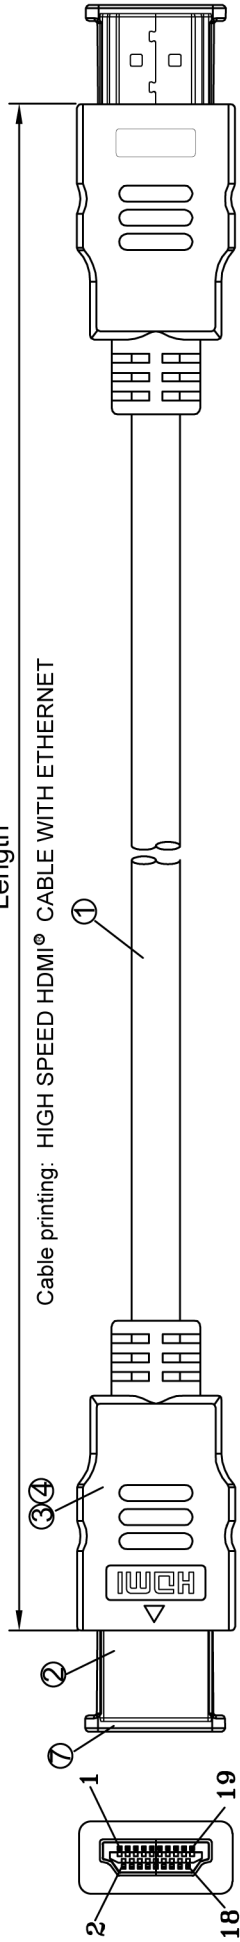


Remark:

- 1.100% Open/Short Test
- 2.Conductive Resistance:15ohms MAX
- 3.Insulation Resistance:5M ohm MIN.
- 4.HI-POT:DC 300V/10MS.
- 5.The product is Reach/RoHS 2.0 compliant.
- 6.Support 4K*2K@60Hz

Signal Assignment

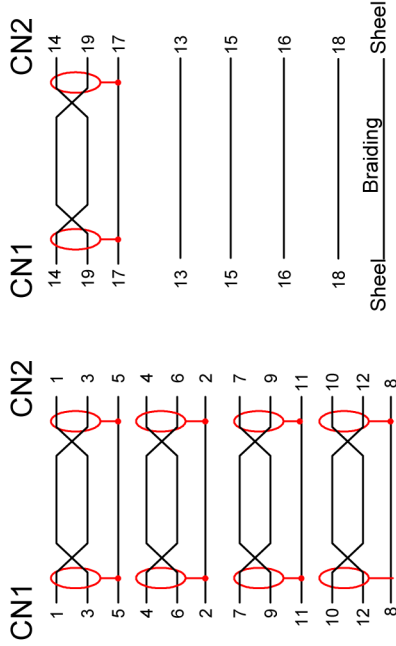

Cable Spec.

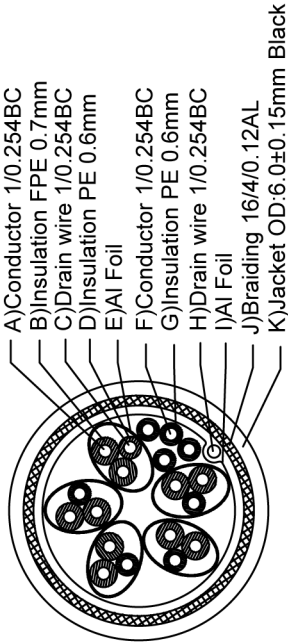

ERP NO.:	SAMPLE DWG NO.:
DOC No.:	REVISION A0
CUSTOMER:	UNIT mm
CUSTOMER P/N:	SCALE NO
DESCRIPTION	PAGE NO 1/1
APPROVAL	DATE 2019/11/23
CHECKED	DRAWN

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	HDMI Protective Cap, PE	2PCS	
④	External Mold	2PCS	
③	Internal Mold	2PCS	
②	Connector	2PCS	
①	Cable		
TOLERANCES UNLESS OTHERWISE STATED X = ±1 XX = ±0.2 XX = ±0.1			