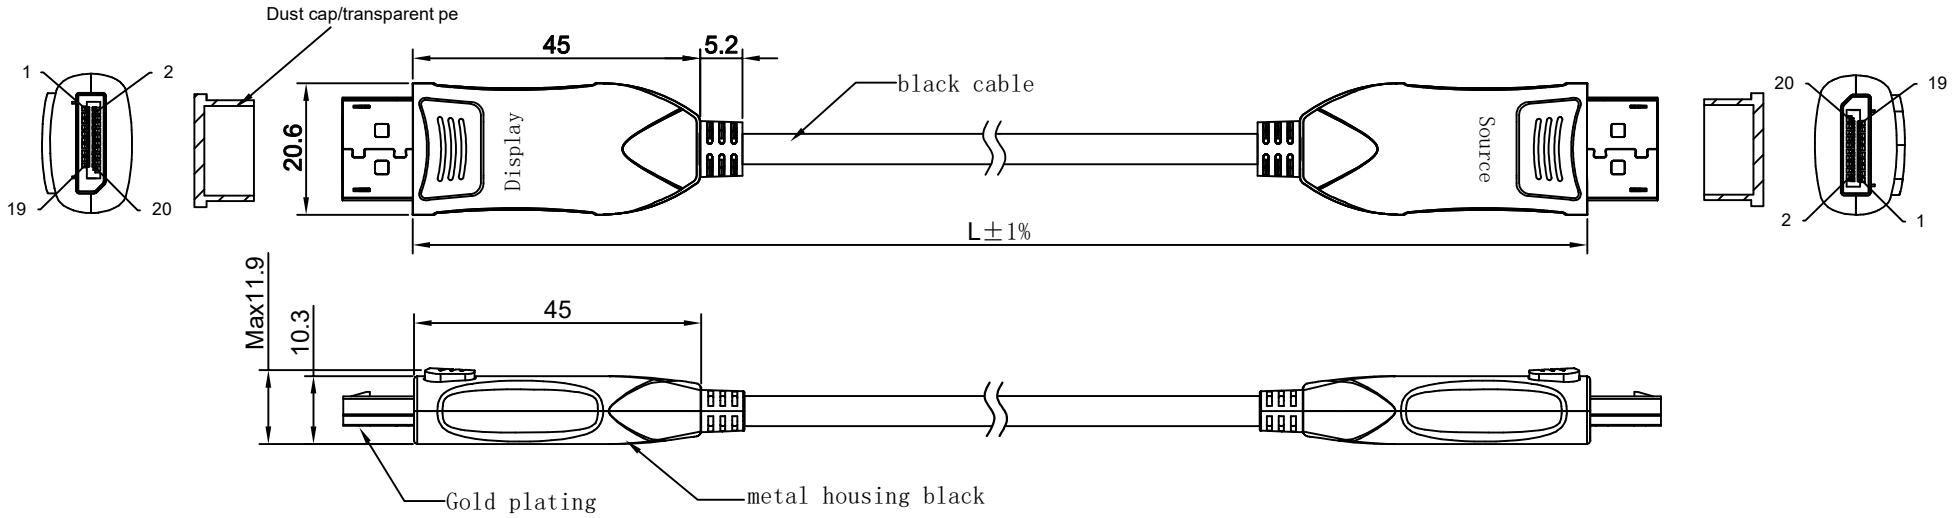

NOTE:

- Display port 2.0/1.4 Mode
- Supports bandwith up to 32.4Gbps
- Input: Source port Male TX
- Output: Display port Male RX
- Plug and Play
- Connector the pin and shell gold plating
- Metal housing with lock
- Converts electrical data signals to optical signals
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket OD. 4.8+/-0.2mm
- Easy to install with Active Optic Cable
- Resolution 8K@60Hz(4:4:4)8bit,4K@120Hz(4:4:4)8bit
- Supports 3D/HDCP2.2/DPCP1.0/EDID/HDR10/DSC1.2/Dolby MAT/DTS HD
- ROHS 3.0 and REACH compliant
- Operation temperature : 0℃-+50℃
- Storage temperature : -20℃-+70℃

1pc/ESD Bag+brown box

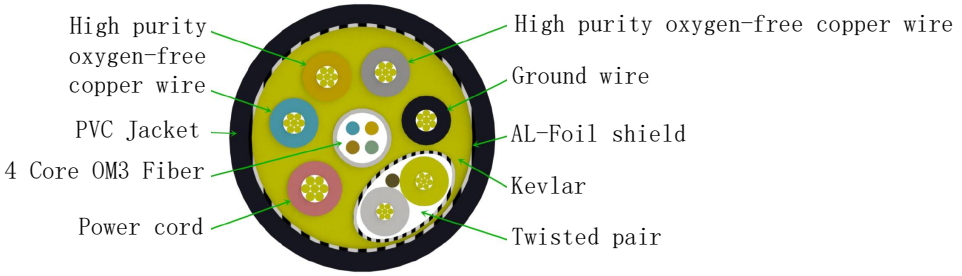

THE CAHRT

ITEM NO.	Length (mm)
S215920	7500
S215921	10000
S215922	15000
S215923	20000
S215924	25000
S215925	30000

		NEW	2022-12-06	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

SYNERGY21			
CUSTOMER		ITEM NO.	SEE THE CAHRT
PRODUCT NAME	Displayport 2.0/1.4 AOC cable	manufacture country:	CHINA UNIT MM
DRAWNBY	CHECKBY	APPOBY	DATE
SYNERGY21	SYNERGY21	SYNERGY21	2022-12-06