

## ALLNET PoE Injector 1G/2.5G/5G PoE & PoE bt (15.4W/30W/60W) / plastic housing / "ALL-PI102-5G".

>>> Al artículo de la tienda



### EAN CODE



## ALLNET PoE Injektor 1G/2.5G/5G PoE & PoE bt (15,4W/30W/60W) / Kunststoffgehäuse / "ALL-PI102-5G"

### Highlights:

- Entspricht dem Standard IEEE802.3af/at/bt
- Multi-G Standard, Unterstützt 10/100/1000/2500/5000Mbps
- Unterstützt PoE-Leistung bis zu 60W
- Strom und Daten auf bis zu 100m
- Plug-und-Play, erfordert keine Konfiguration
- kompaktes Kunststoffgehäuse
- PoE Leistung 55Vdc mit max. 1.1A PoE PD über 4 Paare.

Our PoE Injector - Powerful and Reliable

Our PoE Injector complies with the IEEE802.3af/at/bt standards and is the ideal solution to ensure power delivery to your PoE-enabled devices. Supporting speeds of 10/100/1000/2500/5000Mbps, it offers the necessary bandwidth for seamless data transmission.





What sets this Injector apart is its impressive PoE power delivery of up to 60W, which is more than sufficient to power demanding devices while maintaining stable and reliable power even over distances of up to 100 meters.

Installation is a breeze, as our PoE Injector is a plug-and-play device that requires no complex configuration. Its compact plastic housing provides a space-saving solution without compromising on robustness.



Número de artículo: 211682  
Número de fabricante: ALL-PI102-BT60-5G

With a PoE power delivery of 55V DC and a maximum of 1.1A PoE PD over 4 pairs, our PoE Injector offers the required power to get your devices up and running. Rely on our technology to meet your PoE requirements and optimize your network

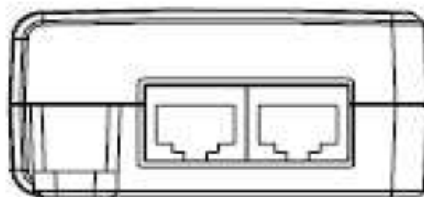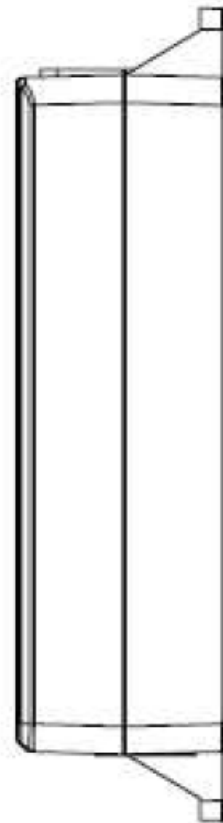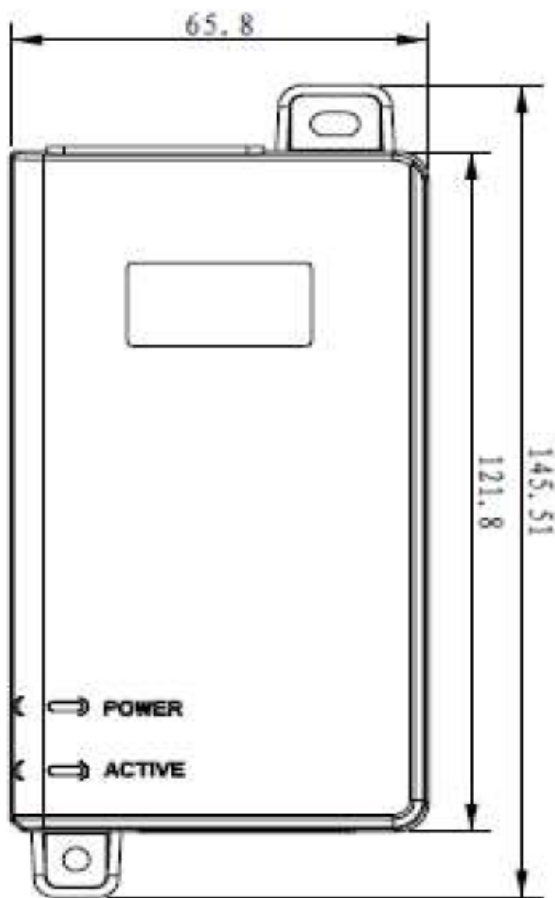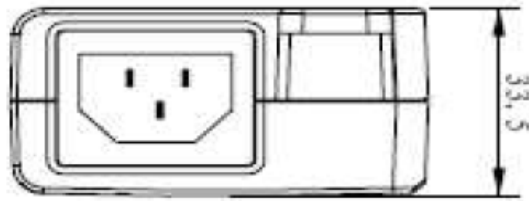



## Technical Details:

<b>Model</b>	ALL-PI102-5G
<b>Port</b>	Data in: 1x10/100/1000/2500/5000Mbps RJ45 Port PoE Out: 1x10/100/1000/2500/5000Mbps RJ45 Port
<b>Standards</b>	<ul style="list-style-type: none"> <li>- IEEE802.3 10Base-T Ethernet</li> <li>- IEEE802.3u 100Base-Tx Fast Ethernet</li> <li>- IEEE802.3ab 1000Base-T Gigabit Ethernet</li> <li>- IEEE802.3bz 2.5GbE/5GbE NBASE-T</li> <li>- Full compliant with IEEE802.3af/at, PoE++</li> <li>- RoHS Compliance</li> <li>- WEEE Compliance</li> </ul>
<b>PoE Standard</b>	IEEE802.3af/at/bt
<b>PSE Power on RJ-45</b>	4Pairs power lines: 1/2(-),3/6(+) 4/5(+),7/8(-)
<b>PoE Power Output</b>	55V DC, 1,1A Max.
<b>Power supply</b>	60W
<b>Input Power Supply</b>	AC 100-240V 50/60Hz
<b>Operation Temperature</b>	0°C ~ 40°C
<b>Storage Temperature</b>	-20°C ~ 70°C
<b>Operation Humidity</b>	10%~90% RH non-condensing
<b>Storage Humidity</b>	5%~90% RH non-condensing
<b>Dimensions (L*W*H)</b>	145,51mm x 65,8mm x 33,5mmm
<b>Weight</b>	255g
<b>Mounting</b>	Wall-mounted
<b>IP Rated</b>	IP40
<b>LED Indicator</b>	Power Indicator : Green - PoE Load Indicator : Green @ 30W Blue @ 30W 60W
<b>Network Media(Cable)</b>	10BASE-T: UTP category 3, 5 cable (?100m) 100BASE-TX: UTP category 5e cable (?100m) 1000BASE-T: UTP category 5e,6 cable(?100m)
<b>Surge Protection</b>	<ul style="list-style-type: none"> <li>- Line-Earth 1.2/50us (8/20us): 2KV</li> <li>- Line-Line 1.2/50us (8/20us): 1KV</li> </ul>
<b>Immunity</b>	<ul style="list-style-type: none"> <li>- IEC60068-2-6(Vibration)</li> <li>- IEC60068-2-27(Impact)</li> <li>- IEC60068-2-32(Free Fall)</li> </ul>
<b>EMS</b>	<ul style="list-style-type: none"> <li>- IEC61000-4-2(ESD) ± 6kV(contact), ±8kV(air)</li> <li>- IEC61000-4-3(RS) 10V/m(80MHz~2GHz)</li> </ul>



Número de artículo: 211682  
Número de fabricante: ALL-PI102-BT60-5G

	- IEC61000-4-4(EFT) Power Port: $\pm 2$ kV; Data Port: $\pm 1$ kV - IEC61000-4-5(Surge) Power Port: $\pm 1$ kV/DM, $\pm 2$ kV/CM - IEC61000-4-6(CS) 10V(150kHz~80MHz)
<b>EMI</b>	- FCC CFR47 Part 15, EN55024, EN55032
<b>Marks</b>	- cUL/UL - FCC - CE

## Atributos

Atributo	Valor
Einsatzbereich:	Indoor
Gehäuse:	Kunststoff
Geschwindigkeit Injektor:	10M (10Mbit/s); 100M (100Mbit/s); 1G (1000Mbit/s); 2.5G (2500Mbit/s); 5G (5000Mbit/s);
PoE Leistung:	15;30;60;
Peso:	0.255 Kg
Garantía:	24.00 Meses

## Accesorios

Número de artículo	Denominación
193972	ALLNET RJ45 Sicherungskupplung, Abwurfbuchse, PoE fähig, bis
201008	ALLNET Acoplador magnético RJ45, 50uds
99305	ALLNET ALL951000 Protector contra rayos Cat 6
198028	ALLNET TP Cat 6 Überspannungs-/Blitzschutz Surge Protector A