
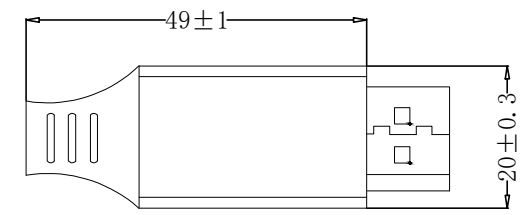


WIRE DIAGRAM

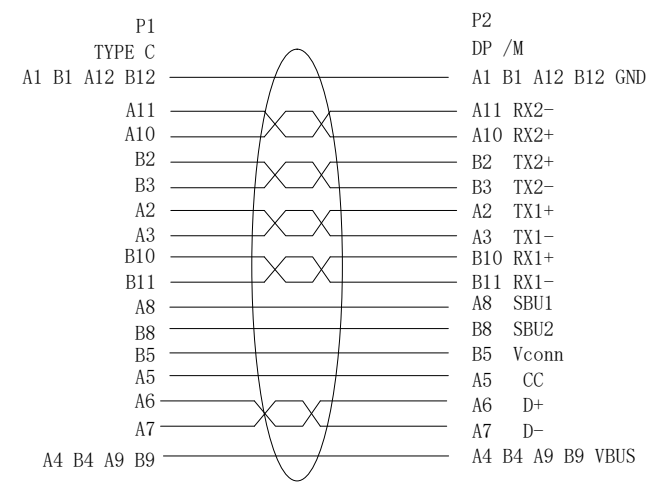

NOTE:

1. USB Type C male input, DP male output
2. 100% MAC BOOK + Monitor test  
(1). Resolution: 3840×2160@60Hz
3. RoHS 3.0 and REACH Compliant
4. Cable Marking: USB3.1 CABLE E473610 兄 AWM STYLE 20276 80°C 30V VW-1
5. Single Pack: 1PC/flag label (WEEE)/SYNERGY 21 A bag+label

MATERIAL LIST:

⑥	Outer Mold	40P PVC, BLACK	2	
⑤	HOUSING	Aluminium Housing cool grey 11C	2	
④	INNER MOLD	LD-PE	2	
③	DP MALE	DP/MALE, BLACK INSULATION, THE PIN GOLD PLATED, THE SHELL FOR GOLD PLATED+PCB	1	
②	USB C TYPE	USB C /M Solder Type, Black PBT Insulation, The Pin Gold Plating, the shell for GOLD Plating	1	
①	CABLE	USB TYPE-C 3.2 CABLE [32AWGx1P+AM+M]x4PCS+32AWGx1P+32AWGx4C+26AWGx2C+D+AM+B+PVC/BLACK JACKER:black Cotton braid OD:5.0±0.2MM	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK

ITEM NO.	LENGTH
S215442V3	2000±40MM

<b>SYNERGY21</b>					
CUSTOMER	AN		ITEM NO.		
PRODUCT NAME	USB 3.2 Type C Male to DP 1.4V male	manufacture country:	CHINA	UNIT	MM
DRAWNBY	CHECKBY	APPOBY	DATE		
SYNERGY21	SYNERGY21	SYNERGY21	2023-02-20		

		NEW	2023-02-20	AO
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.