

# HDMI HDBaseT Extender

## VE811

- The ATEN VE811 HDMI HDBaseT Extender guarantees the optimum HDMI connection up to 100 m over a single Cat 5e/6a or ATEN 2L-2910 Cat 6 cable. The VE811 meets HDMI Specification features including 3D, Deep Color, HD lossless audio formats and CEC pass-through. It supports Dolby Digital 5.1, DTS HD audio and video signals at resolutions up to 4K. In addition, the VE811 supports long reach mode, providing an effective means for extending HDMI signals up to 150m over a single Cat 5e/6 cable.

Pushing the technology and design to the limit, the compact design makes the VE811 easy to mount in any location. Engineered for today's digital trends, the VE811 is ideal for meeting rooms, or any setting that requires high quality HDMI video to be extended for great distances.




**HDMI™** **4Kx2K™**  
HIGH DEFINITION MULTIMEDIA INTERFACE



## Features

- HDBaseT Connectivity – extends an HDMI connection up to 100m via a single Cat 5e/6a or ATEN 2L-2910 Cat 6 cable
- Supports HDBaseT Long Reach Mode – up to 150 m via a single Cat 5e/6 cable at resolutions up to 1080p
- HDMI (3D, Deep Color, 4K)
- HDCP 2.2 compatible
- Supports resolutions of up to Ultra HD 4Kx2K and 1080p Full HD
- Consumer Electronic Control (CEC) allows interconnected HDMI devices to communicate and respond to a single remote control
- Supports wide screen format
- Plug and play – no software required
- Built-in 8KV/ 15 KV ESD protection
- Rack Mountable

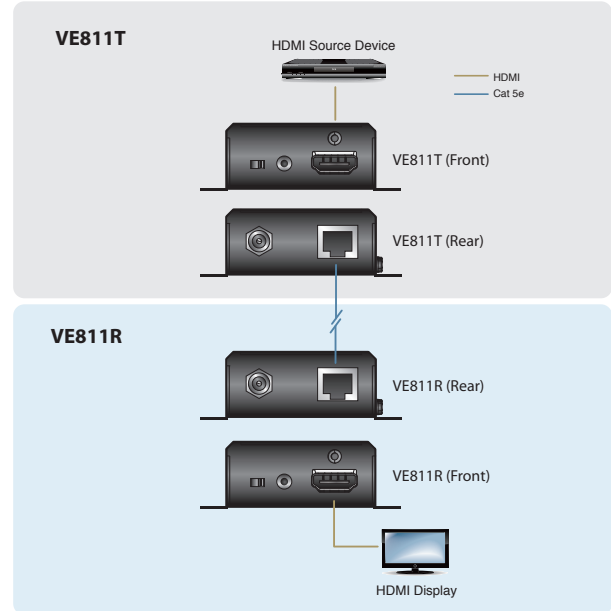

## Specifications

Function	VE811R	VE811T
<b>Video Input</b>		
Interfaces	N/A	1 x HDMI Type A Female (Black)
Impedance	N/A	100
Max. Distance	N/A	1.8 m
<b>Video Output</b>		
Interfaces	1 x HDMI Type A Female (Black)	N/A
Impedance	100	N/A
<b>Video</b>		
Max. Data Rate	10.2Gbps (3.4Gbps per lane)	
Max. Pixel Clock	340 MHz	
Compliance	HDMI (3D, Deep Color, 4K); HDCP Compatible; Consumer Electronics Control (CEC)	
Max. Resolutions / Distance	Up to 4K @ 70m (Cat 5e/6) / 100m (Cat 6a/ATEN 2L-2910 Cat6); 1080p @ 100m (Cat 5e/6/6a) *4K supported: 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)	
<b>Audio</b>		
Input	N/A	1 x HDMI Type A Female (Black)
Output	1 x HDMI Type A Female (Black)	N/A
<b>Connectors</b>		
Unit To Unit	1 x RJ-45 Female	
Firmware Upgrade	1 x Mini Stereo Jack Female (Black)	
<b>Switches</b>		
Long Reach Mode Switch	1 x Slide Switch - ON/OFF	
<b>Power</b>		
Connectors	1 x DC Jack (Black) with locking	
Consumption	DC 5V, 3.9W	DC 5V, 3.8W
<b>Environmental</b>		
Operating Temperature	0° to 40° C	
Storage Temperature	-20° to 60° C	
Humidity	0 - 80% RH, Non-Condensing	
<b>Physical Properties</b>		
Housing	Metal	Metal
Weight	0.17 kg	0.16 kg
Dimensions (L x W x H) with bracket	8.64 x 7.30 x 2.47 cm	8.64 x 7.30 x 2.47 cm
Dimensions (L x W x H) without bracket	8.20 x 5.20 x 2.37 cm	8.20 x 5.20 x 2.37 cm

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Publish Date: 10/2017 V1.0



© Copyright 2017 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.