

LA-2403 24-INCH FULL HD DESKTOP MONITOR




FEATURES

- Ensuring eye comfort: Equipped with flicker-free and low blue light technology, aiding in reducing eye fatigue and supporting prolonged comfortable viewing for office tasks.
- High 100Hz Refresh Rate for Smooth Visuals: Ensures fluid and clear visuals during intensive multitasking and multimedia tasks, enhancing productivity.
- Crisp Full HD and IPS Display: Experience consistent clarity and color accuracy from all viewing angles, suitable for various detailed works and collaborative projects.
- Multiple Ports for Easy Connectivity: Comes with DisplayPort, HDMI, and VGA ports to ensure seamless integration with a variety of devices, maintaining continuous workflow efficiency.

The LA-2403 monitor is suitable for office environments. Its key attributes include tilt adjustments ranging from -5° to 20° , ensuring a comfortable and healthier viewing experience. With a 100Hz refresh rate and Full HD IPS display, it delivers borderless visuals and accurate colours, complemented by a wide 178-degree viewing angle to meet diverse business needs. Additionally, it boasts a high dynamic contrast ratio of 20,000,000:1 (DCR), showcasing impressive image details and rich colours. Equipped with multiple ports including DisplayPort, HDMI, and VGA, it seamlessly integrates with various devices, facilitating efficient workflow and productivity enhancements.

TECHNICAL DRAWING

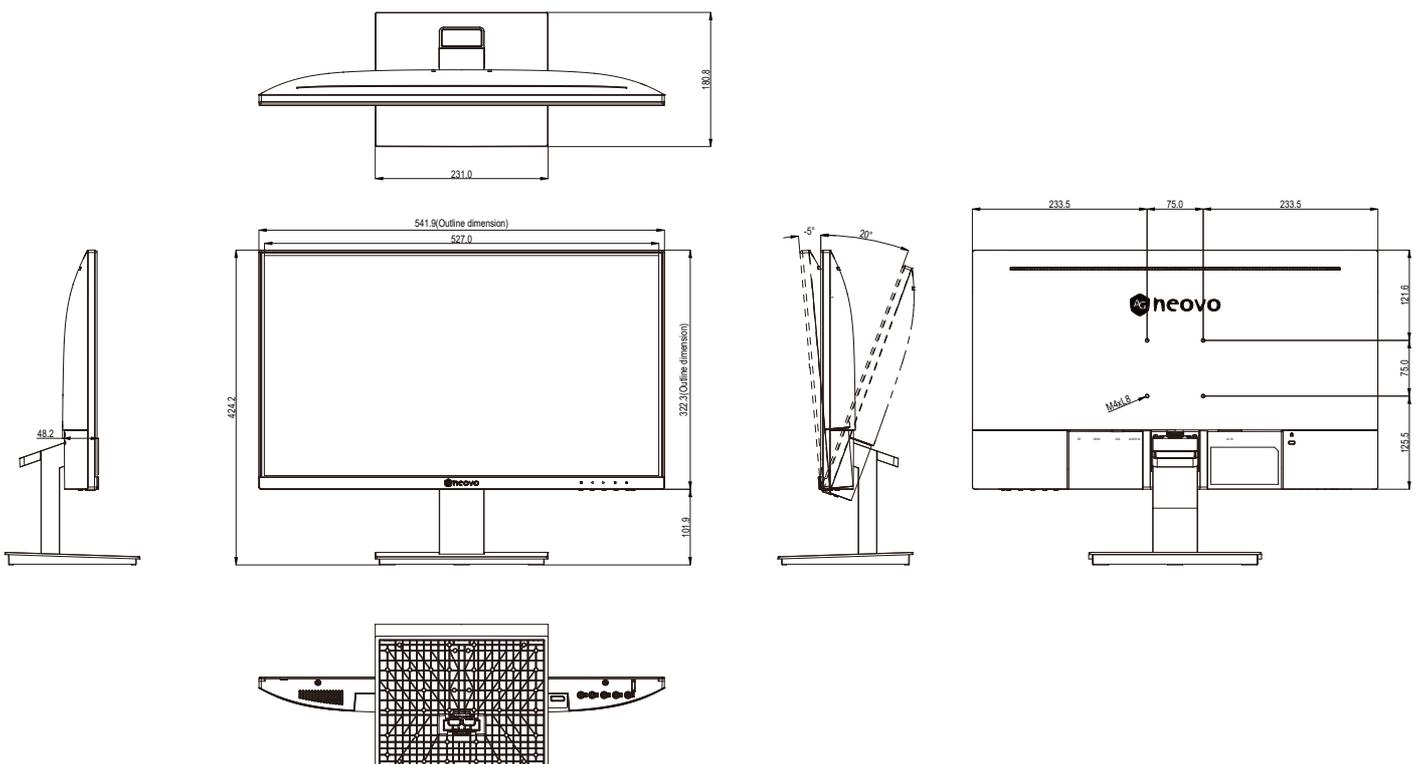

SPECIFICATIONS

Panel	
Panel Type	LED-Backlit TFT LCD (IPS Technology)
Panel Size	23.8"
Max. Resolution	FHD 1920 x 1080
Pixel Pitch	0.275 mm
Brightness	250 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°
Display Colour	16.7M
Response Time	5 ms
Frequency	
Frequency (H)	30 kHz-113 kHz
Frequency (V)	48 Hz-100 Hz
Signal Input	
DisplayPort	x 1
HDMI	1.4 x 1
VGA	15-Pin D-Sub x 1
Audio	
Audio In	Stereo Audio Jack (3.5 mm)
Internal Speakers	1 W x 2
Power	
Power Requirements	AC 100-240V, 50/60 Hz
On Mode	14W (On)
Standby Mode	< 0.5W
Off Mode	< 0.3W
Power Supply	Internal
Operating Conditions	
Temperature	0°C-40°C (32°F-104°F)
Humidity	20%-85% (non-condensing)
Storage Conditions	
Temperature	-20°C-60°C (-4°F-140°F)
Humidity	5%-95% (non-condensing)
Mounting	
VESA FPM/PMI	Yes (75 x 75 mm)
Stand	
Tilt	-5° to 20°
Security	
Kensington Security Slot	Yes
Dimensions	
Product with Base (W x H x D)	541.9 x 424.2 x 180.8 mm (21.3" x 16.7" x 7.1")
Product w/o Base (W x H x D)	541.9 x 322.3 x 48.2 mm (21.3" x 12.7" x 1.9")
Packaging (W x H x D)	602.0 x 407.0 x 122.0 mm (23.7" x 16.0" x 4.8")
Weight	
Product with Base	3.3 kg (7.3 lb)
Product w/o Base	2.8 kg (6.2 lb)
Packaging	4.5 kg (9.9 lb)
Regulation Approval	
Certifications & Compliance	CE, LVD, WEEE, RoHS, REACH, EAC, FCC, ICES 003
Accessories	
Supplied	HDMI Cable, Power Cord, Quick Start Guide
Optional Accessories	
Desk mount	DMC-01, DMC-02D, DMS-01D, ES-02
Wall Mount	PMK-01, WMA-01, WMK-01



All specifications are subject to change without prior notice.
Copyright © 2024 AG Neovo. All rights reserved.
The name AG Neovo is a trademark of AIC.
All other trademarks are the property of their respective owners.
P/C: LA2430 Version 1.0, 20240723