



REVISION		
REV	DATE	APPRO.BY

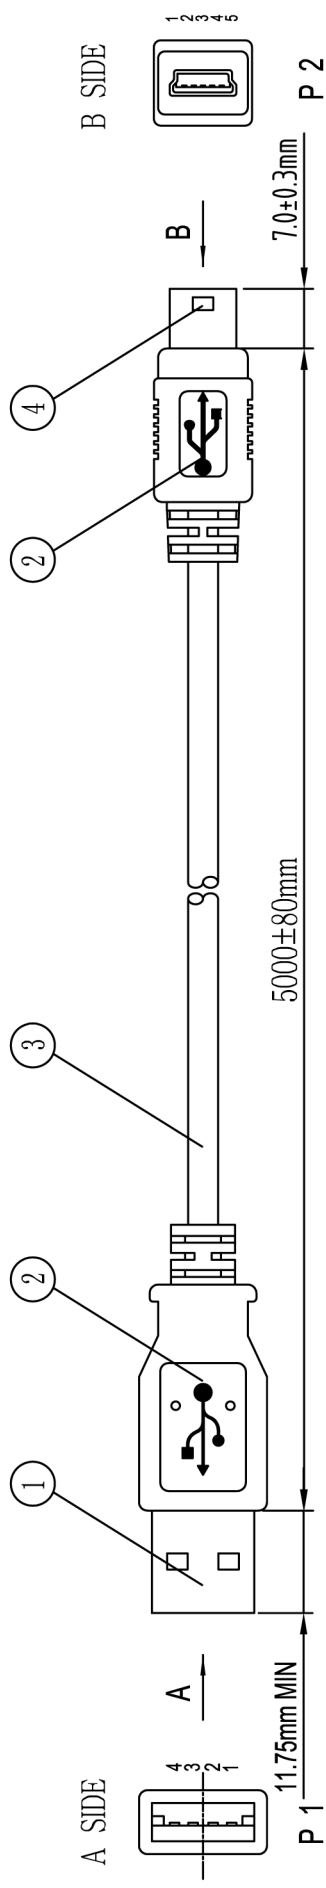

WIRING DIAGRAM

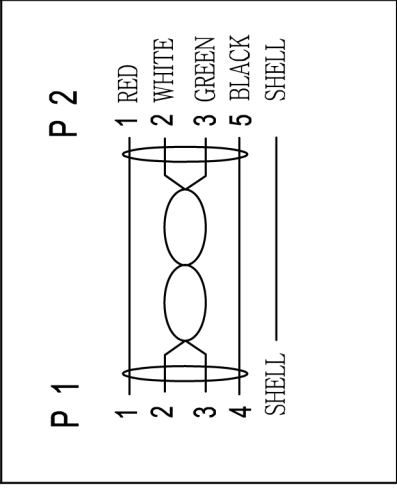

NOTE:
 1.PRINTING:
 AWM 80°C 30V VW-1 28AWG×1P 24AWG×2C
 USB2.0 HIGHSPEED CABLE
 2.RoHS COMPLIANT

NO.	MAT.NAME	DESCRIPTION	QTY
④	CONNECTOR	MINI USB 5Pin B TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1
③	CABLE	28AWG TXR*1P+24AWG TXR*2C+AL+B(COVERAGE RATE IN 65%) USB2.0 HIGHSPEED CABLE JACKET PVC BLACK OD=4.5±0.2mm	1
②	OVERMOLD	PVC COLOR:BLACK	2
①	CONNECTOR	USB A TYPE MALE NICKEL SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1

CUSTOMER'S ITEM	K5250SW.5V2	CUSTOMER	EFB
DRAWING	TITLE	USB CABLE	
	UNIT	mm	
DRAWN BY	Zhouqinghua	SCALE	1:1
CHECK BY		REV	A/0
APPRO BY		DATE	2020-09-01

