


Synergy 21 Tira LED Flex DC24V/36W, RGB, Positivo, IP68, 5m



kwh/1000h:	36,00
Lúmenes:	1200
Vatio:	36,0
Vida útil nominal:	35000 Std.
Ciclos de conmutación:	50000
Temperatura ambiente óptima:	25 °C

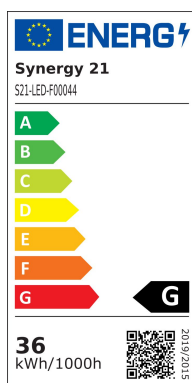

Características técnicas:

- DC24V/max. 1,5A/ 36W
- Número de leds: 150 LEDs 5050
- Flujo luminoso: 1200-1275lm
- Ángulo de enfoque: 120°
- Clase de protección: IP68
- Polo positivo
- Dimensiones: 5000 x 10 x 3 mm
- Se puede cortar cada 10 cm (3 Leds)
- Incluye autoadhesivo en la parte trasera
- Clase de eficiencia energética: A
- kWh/1000h: 36

Tenga en cuenta que las tiras de Synergy 21 deben funcionar a una temperatura no superior a 40°.


Atributos


Atributo	Valor
Abstrahlwinkel:	120

Atributo	Valor
Ampere:	1.50
CC oder CV:	CV
Dimmbar:	abhängig vom Netzteil
EPREL_ANTI_GLARE_SHIELD:	false
EPREL_BEAM_ANGLE:	Not applicable
EPREL_BEAM_ANGLE_CORRESPONDENCE:	SPHERE_360
EPREL_CAP_TYPE:	/
EPREL_CHROMATICITY_COORD_X:	0.000
EPREL_CHROMATICITY_COORD_Y:	0.000
EPREL_CLAIM_EQUIVALENT_POWER:	false
EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE:	false
EPREL_CONNECTED_LIGHT_SOURCE:	false
EPREL_CORRELATED_COLOUR_TEMP_TYPE:	RANGE
EPREL_DIMENSION_DEPTH:	0
EPREL_DIMENSION_HEIGHT:	0
EPREL_DIMENSION_WIDTH:	0
EPREL_DIMMABLE:	NO
EPREL_DIRECTIONAL:	NDLS
EPREL_ENERGY_CONS_ON_MODE:	0
EPREL_ENVELOPE:	NO
EPREL_EQUIVALENT_POWER:	Not applicable
EPREL_HIGH_LUMINANCE_LIGHT_SOURCE:	false
EPREL_LIGHTING_TECHNOLOGY:	LED
EPREL_LUMEN_MAINTENANCE_FACTOR:	0.98
EPREL_LUMINOUS_FLUX:	0
EPREL_MAINS:	NMLS
EPREL_MAX_BEAM_ANGLE:	Not applicable
EPREL_MIN_BEAM_ANGLE:	Not applicable
EPREL_POWER_ON_MODE:	0.0
EPREL_POWER_STANDBY:	0.00
EPREL_REGISTRANT_NATURE:	MANUFACTURER

Atributo	Valor
EPREL_SURVIVAL_FACTOR:	1.00
Länge:	5
LED Strip Klebeband:	ja
LED Strip Breite:	13
LED Strip Höhe:	9
LED Strip Klebeband:	ja
LED Strip kürzbar:	200
LED Strip Länge:	5000
Lichtfarbe:	RGB
Lichtfarbe Name:	RGB
Schutzklasse:	IP68
Volt:	24
Peso:	0.518 Kg

Imágenes adicionales



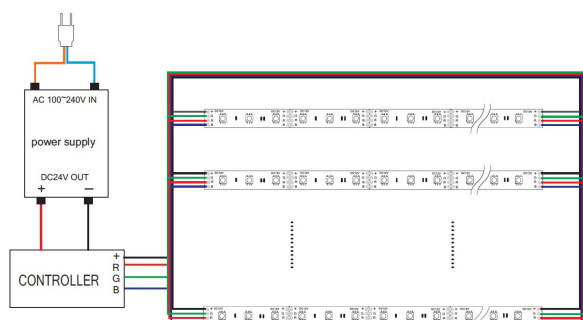

Accesorios

Número de artículo	Denominación
93680	Mean Well HLG-80H-24 Alimentación 24V/80W IP65 Regulable
93682	Mean Well HLG-150H-24 Alimentación 24V/150W IP65 Regulable
148726	Synergy 21 Outdoor Kabelverbinder IP68 1:1
148727	Synergy 21 Outdoor Kabelverbinder IP66 1:2
148730	Synergy 21 Outdoor Kabelverbinder IP66 Box 3 Ports
148729	Synergy 21 Outdoor Kabelverbinder IP68 Box 3 Ports transparent
148728	Synergy 21 Netzteil - Wasserdichte Verbinder Box 4 Ports
183258	Shelly RGBW2 Relé Wi-Fi