
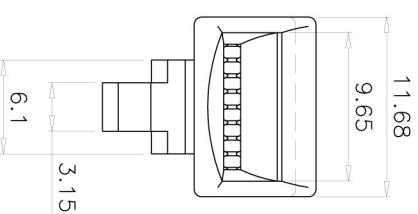
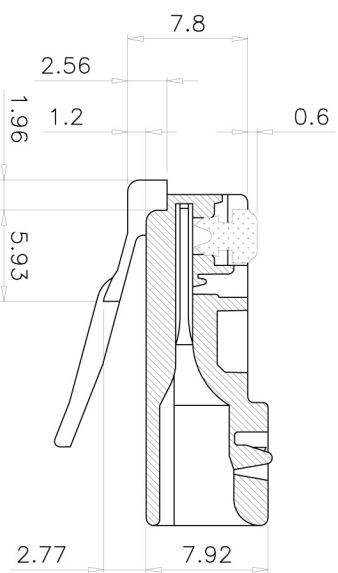
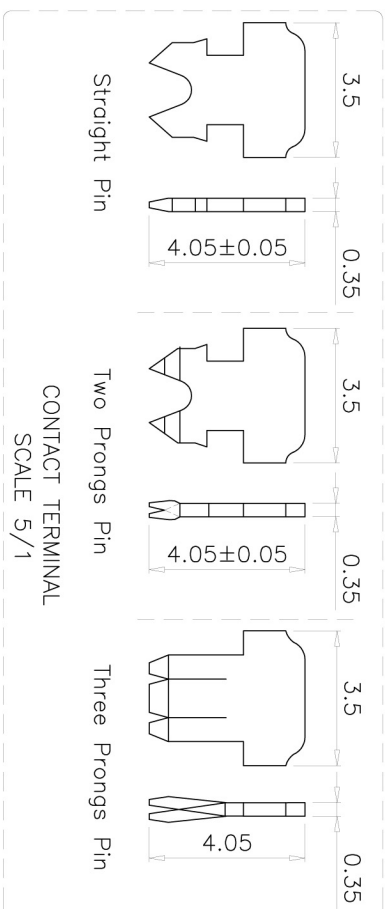


SCALE 2/1

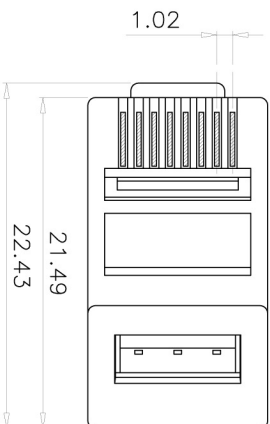

Specification :

- Material :
1. Housing : PC, UL 94V-2, Transparency color.
  2. Contact Terminal : Phosphor Bronze.  
Finished : Min. 6, 15, 30 or 50 micro-inch Gold plating over 50 micro-inch Nickel plated on contact area.

- Performance :
- a. Operation Temperature : -40°C to 80°C.
  - b. Cable to Plug Tensile Strength : 7.7 kgs.
  - c. Use for 24-26 AWG stranded wires.

REMARK: PR88XXXX  
(1) (2)

(1): 06=6U", 15=15U", 30=30U", 50=50U"  
(2): Blank=Straight Pin, 2X=Two Prongs Pin,  
3X=Three Prongs Pin

GENERAL TOLERANCE OF DIMENSIONS ±0.1		DRAWING		07.OCT.2004	Michelle
CHECK		07.OCT.2004	Frank		
APPROVAL		07.OCT.2004	Mag'ic		
DATE		NAME		ITEM NO.:	

SCALE	2/1 (A4)	UNIT	mm	DES.:	Unshielded 8P8C
DRAWING NO.	PR88XXXX(SA1)				
DRAWING CLASSIFICATION	S	SHEET	1 OF 1		

DRAWING CLASSIFICATION	S	SHEET	1 OF 1		
------------------------	---	-------	--------	--	--



1 2 3 4 5 6 10cm