


NOTE:

1. The primary coating and secondary coating have the same color
2. Loose buffered, easy strip type at least 1m
3. ROHS 2.0 and REACH compliant

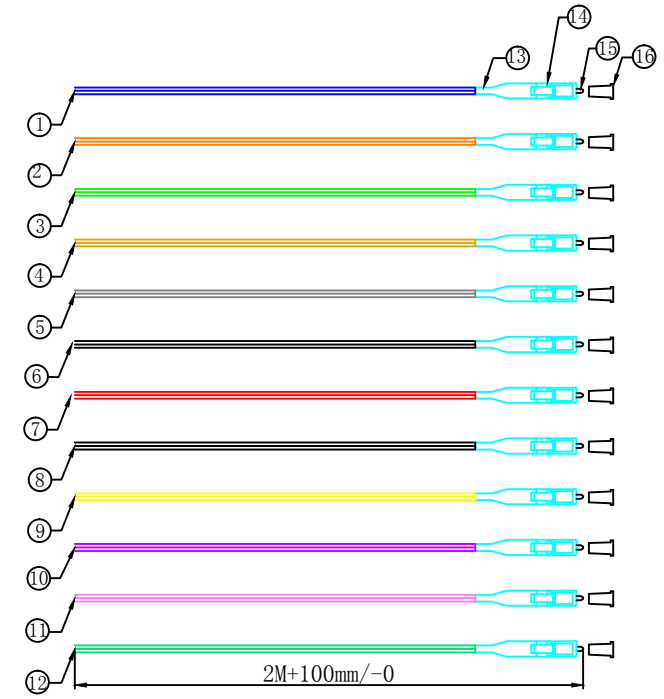

MATERIAL LIST:

⑫	LC White Dust Cap	12	
⑮	LC/ UPC MM Ferrule	12	
⑭	LC MM Aqua 0.9 Connector	12	
⑬	LC 0.9 Aqua Boot	12	
⑫	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm TURQUOISE LSZH	2m	
⑪	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm PINK LSZH	2m	
⑩	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm VIOLET LSZH	2m	
○	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm YELLOW LSZH	2m	
⑨	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm BLACK LSZH	2m	
⑧	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm RED LSZH	2m	
⑦	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm WHITE LSZH	2m	
⑥	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm GREY LSZH	2m	
⑤	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm BROWN LSZH	2m	
④	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm GREEN LSZH	2m	
③	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm ORANGE LSZH	2m	
②	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm BLUE LSZH	2m	


Type	Multi-Mode
Insertion Loss	≤0.3dB (IEC 61300-3-4)
Return Loss	NA
Test Wavelength	850nm
Group Refractive Index	1.482 @850nm 1.477 @1300nm

No.	SPECIFICATION STANDARD		QT' Y	REMARK	SYNERGY 21					
		Add refractive index and Artikel NO	2019-2-12	A2	CUSTOMER		ITEM NO.	S215477V2		
		White Boot, Beige Connector → Aqua Boot and Connector	2017-9-6	A1	PRODUCT NAME	Pigtail LC/UPC OM3 50/125 μm 12 set coloured	manufacture country	CHINA	UNIT	MM
		NEW	2017-4-24	A	DRAWNBY	CHECKBY	APPOBY	DATE		
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2017-4-24		

<b>SYNERGY 21®</b>															
<b>TEST Protokol</b>															
Typ:SYNERGY		ITEM No.				Artikel NO.									
Produkt Beschreibung:															
Stueckzahl :1 Stk															
Einfuegedaempfung nach DIN 18600 Verfahren 7															
Wellenlaenge 850nm															
	Erlaubte	Verlust	blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	turquoise	
Steckerdaempfung	0.3 dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB
Return Loss (MM)															
Ergebnis	OK														
Datum:															
Achtung LWL Komponenten															
- Vorsichtig handhaben -Mindestbiegeradius von 40mm nicht unterschreiten -Stecken u. loesen der Verbindung nur durch															
Handhabung am Steckergehaeuse															
Nicht am Kabel ziehen!!!															
-Reklamationen in diesem Bereich koennen wir nicht anerkennen. -Ferrulen stets durch Staubschutzkap schuetzen und vor jedem Einsatz saeubern.															

Chart:

ITEM NO.	LENGTH.	Artikel NO.	EAN Nummer	PACKING
S215477V2	2.0M	147227	4038816068460	SYNERGY 21 BAG A

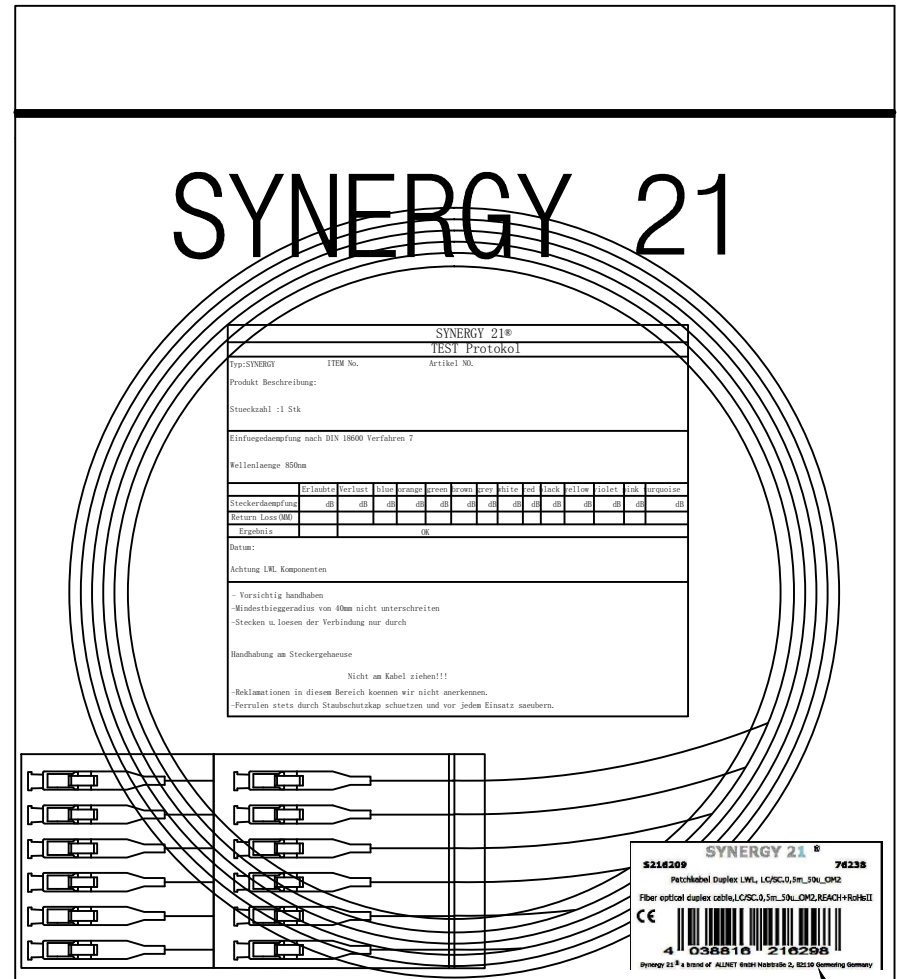

PACKING: PE BAG + LABEL + TEST REPORT

Example Label

SYNERGY 21													
		Add refractive index and Artikel NO				2019-2-12	A2	CUSTOMER				ITEM NO.	S215477V2
		White Boot, Beige Connector → Aqua Boot and Connector				2017-9-6	A1	PRODUCT NAME	Pigtail LC/UPC OM3 50/125 μm 12 set coloured			manufacture country	CHINA UNIT MM
		NEW				2017-4-24	A	DRAWNBY	CHECKBY	APPOBY	DATE		
BY	CHK	REVISION RECORD MODIFICATIONS				DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2017-4-24		