


NOTE:

1. Electrical test:
  - (1). 100% open short & miss wire test;
  - (2). Insulation resistance: DC 300V 0.01s 10M ohm min;
  - (3). Contact resistance: 3 ohm max;
  - (4). Bandwidth: 40Gbps max
2. Computer + Monitor test
  - (1). Resolution: 3840\*2160@120Hz
3. Marking: DisplayPort Cable E\*\*\*\*\* AWM STYLE 20276 80°C 30V VW-1  
 --- 10K/8K DisplayPort 2.0 UHBR 10
4. RoHS (EU2015/863) and REACH Compliant
5. Operating Temperature: 0°C ~ 45°C
6. Storage Temperature: -20°C ~ 70°C
7. Operation humidity: 10% ~ 85%
8. Storage humidity: 10% ~ 85%
9. PACKING: 1PC/SYNERGY 21 A bag+label; SubPack: 10pcs/PE bag+label; Carton +labelx2;

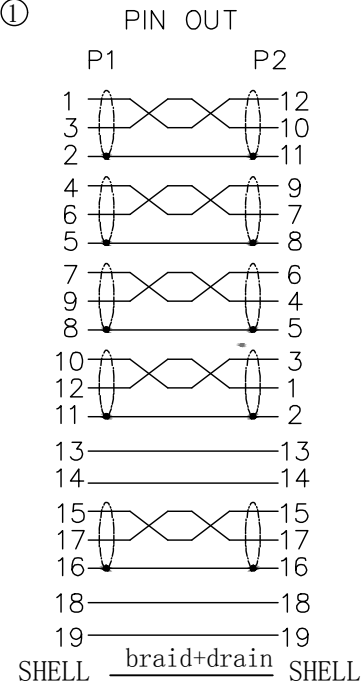

MATERIAL LIST:

⑤	DUST CAP	LD PE	2
④	TUBE END	BLACK PVC 45P	2
③	OUTER COVER	BLACK ABS ASSEMBLY TYPE	2
②	CONNECTOR	DP 20P/M WITH LATCHING Blue INSULATION, THE PIN GOLD PLATED , THE SHELL FOR GOLD PLATED	2
①	CABEL	DP2.0V CABLE [(30AWG BC)*1P+D+FAM]*5+(30AWG BC)*4C+AL-FOIL+(30AWG BC)+BRAID, JACKET:PVC black OD:6.0±0.2mm	1

ITEM NO	LENGTH
S215437V5	500 ± 30MM
S215438V5	1000 ± 30MM
S215439V5	1500 ± 30MM
S215440V5	2000 ± 50MM

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK	CUSTOMER	ITEM NO.	SEE THE CHART
					PRODUCT NAME	30AWG DisplayPort 2.0 UHBR10 Male-Male Black Cable Gold plating	manufacture country: CHINA
		NEW	2021-08-27	A	DRAWNBY	CHECKBY	APPOBY
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21

UNIT	MM
DATE	2021-08-27