


Synergy 21 Tira LED Flex DC12V 24W IP67, blanco neutro



kwh/1000h:	24,00
Lúmenes:	1500
Vatio:	24,0
Vida útil nominal:	35000 Std.
Ciclos de conmutación:	50000
Temperatura ambiente óptima:	25 °C

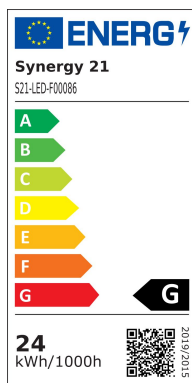

- Tensión: 12V
- Consumo: 24W
- CCT: 4250k ± 250K
- Ángulo de enfoque: 120°
- Cantidad de Leds: 300
- Protección: IP67
- Dimensiones: 5000*8*3mm
- Peso: 0,090kg

Atributos

Atributo	Valor
Abstrahlwinkel:	120
Ampere:	4
CC oder CV:	CV
CRI:	>80
Dimmbar:	abhängig vom Netzteil
EPREL_ANTI_GLARE_SHIELD:	false
EPREL_BEAM_ANGLE:	Not applicable

Atributo	Valor
EPREL_BEAM_ANGLE_CORRESPONDENCE:	SPHERE_360
EPREL_CAP_TYPE:	/
EPREL_CHROMATICITY_COORD_X:	0.383
EPREL_CHROMATICITY_COORD_Y:	0.381
EPREL_CLAIM_EQUIVALENT_POWER:	false
EPREL_COLOUR_RENDERING_INDEX:	93.5
EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE:	false
EPREL_CONNECTED_LIGHT_SOURCE:	false
EPREL_CORRELATED_COLOUR_TEMP_TYPE:	RANGE
EPREL_DIMENSION_DEPTH:	500
EPREL_DIMENSION_HEIGHT:	5
EPREL_DIMENSION_WIDTH:	10
EPREL_DIMMABLE:	NO
EPREL_DIRECTIONAL:	NDLS
EPREL_ENERGY_CLASS:	F
EPREL_ENERGY_CONS_ON_MODE:	2
EPREL_ENVELOPE:	NO
EPREL_EQUIVALENT_POWER:	Not applicable
EPREL_HIGH_LUMINANCE_LIGHT_SOURCE:	false
EPREL_LIGHTING_TECHNOLOGY:	LED
EPREL_LUMEN_MAINTENANCE_FACTOR:	0.98
EPREL_LUMINOUS_FLUX:	251
EPREL_MAINS:	NMLS
EPREL_MAX_BEAM_ANGLE:	Not applicable
EPREL_MAX_COLOUR_RENDERING_INDEX:	95
EPREL_MIN_BEAM_ANGLE:	Not applicable
EPREL_MIN_COLOUR_RENDERING_INDEX:	92
EPREL_POWER_ON_MODE:	3.9
EPREL_POWER_STANDBY:	0.00
EPREL_R9_COLOUR_RENDERING_INDEX:	69
EPREL_REGISTRANT_NATURE:	MANUFACTURER

Atributo	Valor
EPREL_SURVIVAL_FACTOR:	1.00
Länge:	5
LED Strip Klebeband:	ja
LED Strip Breite:	10
LED Strip Höhe:	3
LED Strip Klebeband:	ja
LED Strip kürzbar:	50
LED Strip Länge:	5000
Lichtfabe in Kelvin:	4250
Lichtfarbe:	neutralweiß
Lichtfarbe in Kelvin:	4250
Lichtfarbe Name:	neutralweiß
Lumen:	1500
Schutzklasse:	IP67
Volt:	12
Peso:	0.1 Kg

Accesorios

Número de artículo	Denominación
81069	Synergy 21 Enchufe DC con borne de tornillo
81068	Synergy 21 Conector DC con borne de tornillo
81741	Synergy 21 Clip fijación de silicona para tiras LED, Pack de
76730	Synergy 21 Alimentación 12V/36W/3A
98273	Synergy 21 LED Flex Strip zub. Testklemmen für Single Color
139522	Mean Well LPV-150-12 Alimentación 12V/120W IP67
174654	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 1 line clear
174653	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 1 line red
174656	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 2 line clear
174655	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 2 line red

Número de artículo	Denominación
174648	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 1 line clear
174650	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 1 line clear
174647	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 1 line red
174649	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 1 line red
174652	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 2 line clear
174651	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 2 line red
174628	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to strip Joint 10mm IP65/54
174623	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to Wire 10mm IP65/54
174632	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to Wire 8/10mm IP67
181661	Mean Well WPD-06 Dimmer EnOcean wireless PWM