




REV.		REVISED DESCRIPTION	DATE	CHECKED
A0				
		FIRST RELEASE	2019/11/23	

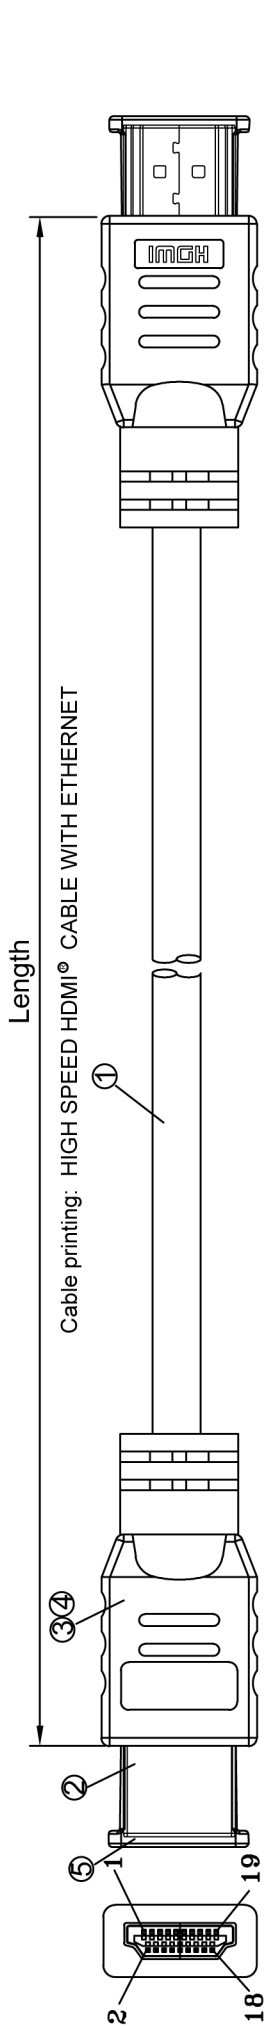

Remark:

1.100% Open/Short Test
2.Conductive Resistance:15ohms MAX
3.Insulation Resistance:5M ohm MIN.
4.HI-POT:DC 300V/10MS.
5.The product is Reach/RoHS 2.0 compliant.
6.Support 4K*2K@60Hz

Signal Assignment

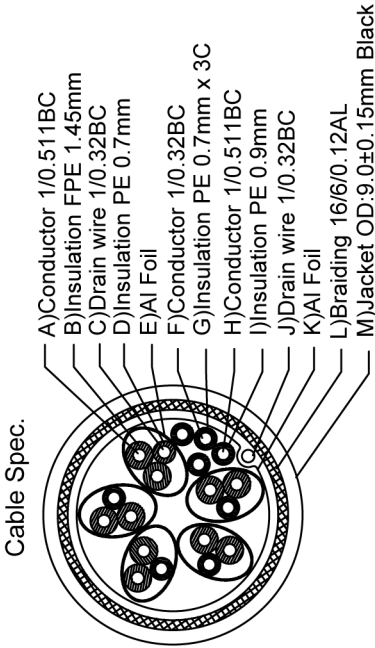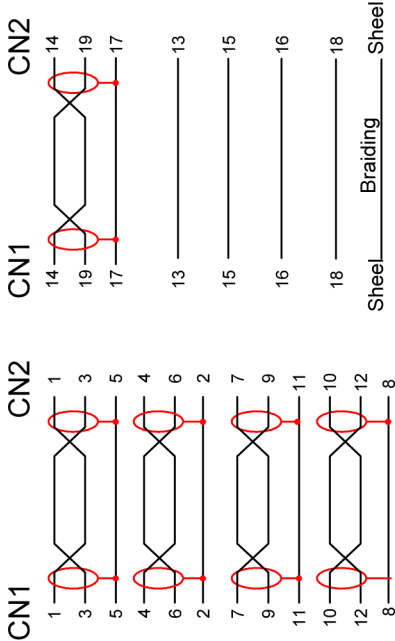

Item NO.	Length
K5431SW.20	20.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK
⑤	External Mold	HDMI Protective Cap, PE	2PCS	
④	Internal Mold	Outer Mould 45P PVC, Black	2PCS	
③	Connector	Inner Mould PE	2PCS	
②		HDMI A PLUG PIN, Gold-Plated	2PCS	
①	Cable	24+28+24AWG 2.0V (19+1BC) 96ALB HDMI Cable OD:9.0mm (0.511BC+HDPE)*1C + AL + D + 96ALB PVCOD9.0mm		

ERP NO.:	SAMPLE DWG NO.:
ZG No.:	REVISION
CUSTOMER:	UNIT
CUSTOMER P/N:	SCALE
DESCRIPTION	PAGE NO
APPROVAL	DATE
CHECKED	DRAWN