



Synergy 21 LED HID Corn Retrofit E40 180° 60W nw

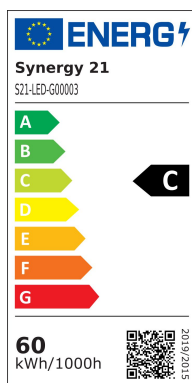

kWh/1000h:	60,00
Lumen:	9000
Watt:	60,0
Nennlebensdauer:	35000 Std.
Schaltzyklen:	50000
Opt. Umgebungstemp.:	25 °C



E40 Gewinde-Sockel (E27 auf Anfrage verfügbar)
Ersatz für 250W HPS / MHL

LED: 294*SMD2835
Farbe: neutralweiss, andere Lichtfarben sind auf Anfrage verfügbar.
Kelvin: 4000K
CRI: >80
Abstrahlwinkel: 180° und Sockel Drehbar um 350°
Wattage (W): 60
Lumen (Lm) : 9000
Abdeckung: milchig
Dimmbar: nein
Voltage (V): 100-277VAC, 50/60Hz
Durchmesser: 92 mm
Gesamtlänge: 275 mm
Schutzklasse: IP64
Betriebstemperatur: -40°~+60°C


Energieeffizienzklasse: A+
kWh/1000h: 60

Merkmale

Merkmal	Wert
Abstrahlwinkel:	180
CRI:	>80
Dimmbar:	nein
Lichtfarbe:	neutralweiss
Lichtfarbe in Kelvin:	4500
Lumen:	9000
Schutzklasse:	IP64
Sockel:	E40
Gewicht:	1.02 Kg
Garantie:	60.00 Monate


Weitere Bilder

Features:

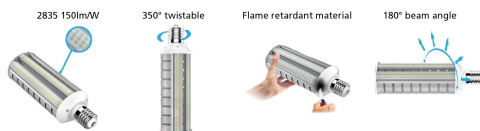

Installation:


Lamp Installation



Step 1 | Fig1
Remove old ballast or disconnect from existing lamp holder. Remove and dispose of ballast in correct manner. (North America 100-277VAC)

Step 2 | Fig2
Reconnect directly to the existing lamp holder. (North America 100-277VAC)

Step 3 | Fig3
Install new LED replacement lamp. Please make sure the old fitting is correctly earth. (North America 100-277VAC)



Zubehör

Art.-Nr.	Name
117502	Synergy 21 LED Adapter für LED-Leuchtmittel E40->E40 lang