

# Outdoor Full-Color Bullet Network Camera

MODEL: VIGI C345 (2.8mm/4mm/6mm)



**4MP | H.265+**  
VIGI C345

Human & Vehicle  
Classification

Smart Detection

Active Defense

True WDR


People & Vehicle  
Analytics

## // Human & Vehicle Classification


Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.



## // Smart Detection



Intrusion Detection



Line-Crossing  
Detection



Object Removal  
Detection




Abandoned Object  
Detection




Region Entering  
Detection



Region Exiting  
Detection



Loitering  
Detection




Scene Change  
Detection

## // VIGI Surveillance Solution


The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

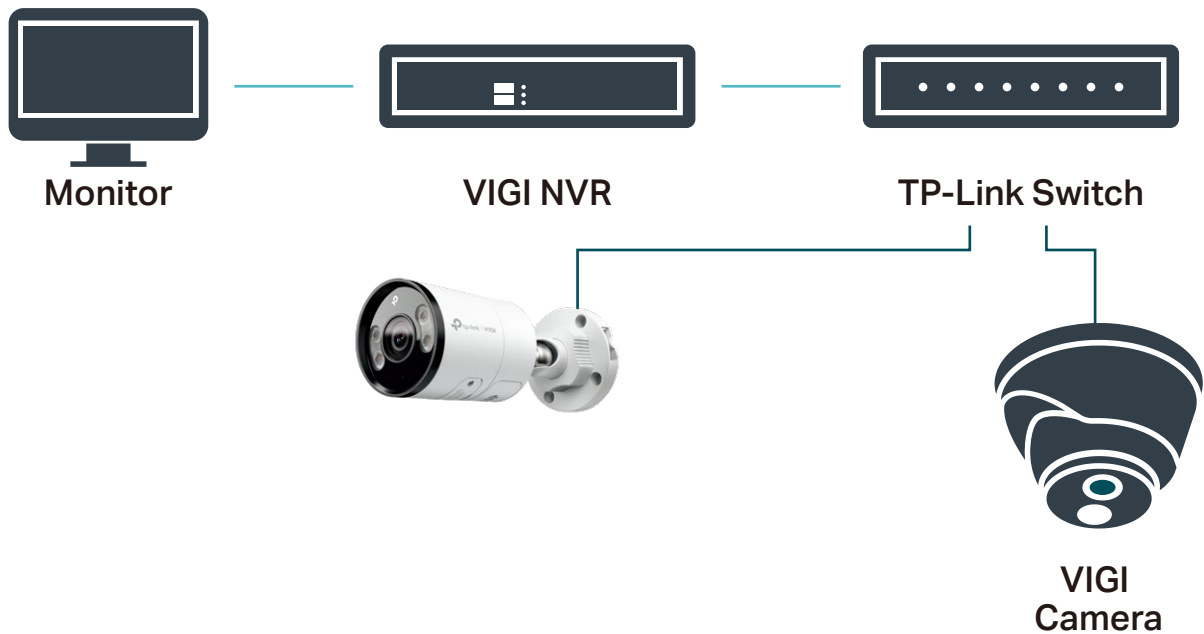

## // Flexible Installation

Find the perfect vantage point by simply securing your camera to the ceiling, wall, or pole\*.

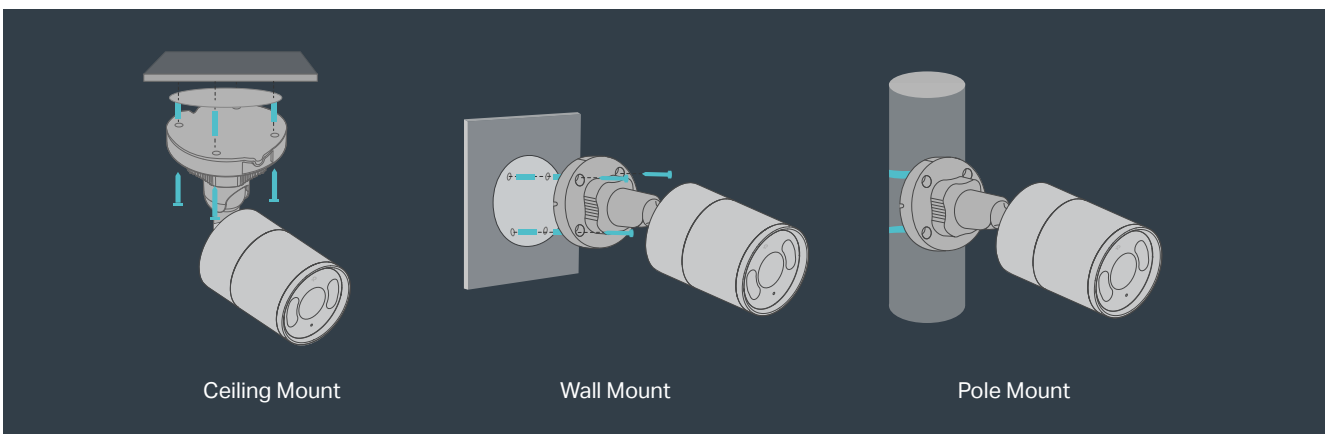

# Specifications

Camera	
Product Model	VIGI C345(2.8mm/4mm/6mm)
Image Sensor	1/2.7" Progressive Scan CMOS
Min. Illumination	0.005 Lux; 0 Lux with IR/White Light
Shutter Speed	1/3 to 1/10000 s
Slow Shutter	Yes
Day & Night Mechanism	IR Cut Filter
Day/Night Switch	Unified/Scheduled/Auto
Lens	
Type	Fixed Focal Lens
Focal Length	2.8mm/4 mm/6 mm
Aperture	F1.6
FOV	<ul style="list-style-type: none"> <li>• 2.8 mm: Horizontal FOV: 100°, Vertical FOV: 54°, Diagonal FOV: 118°</li> <li>• 4 mm: Horizontal FOV: 80.4°, Vertical FOV: 41.8°, Diagonal FOV: 98.7°</li> <li>• 6 mm: Horizontal FOV: 52.7°, Vertical FOV: 29°, Diagonal FOV: 60.8°</li> </ul>
Lens Mount	M12*P 0.5
DORI Distance	<ul style="list-style-type: none"> <li>• 2.8 mm Detect: 64 m (210 ft) Observe: 27 m (89 ft) Recognize: 13 m (43 ft) Identify: 6 m (20 ft)</li> <li>• 4 mm Detect: 80 m (262 ft) Observe: 33 m (108 ft) Recognize: 16 m (52 ft) Identify: 8 m (26 ft)</li> <li>• 6 mm Detect: 120 m (394 ft) Observe: 50 m (164 ft) Recognize: 24 m (79 ft) Identify: 12 m (39 ft)</li> </ul>
Illuminator	
IR LED	Quantity: 2 Range: 30m Wavelength: 850nm
White LED	Quantity: 2 Range: 30m

Illuminator On/Off Control	Auto/Scheduled/Always on/Always off
<b>Video</b>	
Max. Resolution	2688x1520
Main Stream	<ul style="list-style-type: none"> <li>• Frame Rate 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps</li> <li>• Resolution: 2688x1520, 2560x1440, 2304x1296, 2048x1280, 1920x1080, 1280x720</li> </ul> <p>Note:</p> <ul style="list-style-type: none"> <li>• If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps.</li> </ul>
Sub-Stream	<ul style="list-style-type: none"> <li>• Frame Rate 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps</li> <li>• Resolution: 2688x1520, 2560x1440, 2304x1296, 2048x1280, 1920x1080, 1280x720</li> </ul> <p>Note:</p> <ul style="list-style-type: none"> <li>• If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps.</li> </ul>
Bit Rate Control	CBR, VBR
Video Compression	Main stream: H.265/H.265+/H.264/H.264+ Sub-stream: H.265/H.264
Video Bit Rate	<ul style="list-style-type: none"> <li>• Main Stream: 256 Kbps to 6 Mbps</li> <li>• Sub-Stream: 64 Kbps to 512 Kbps</li> </ul>
<b>Image</b>	
Image Settings	Mirror, Brightness, Contrast, Saturation, Sharpness, Exposure, WDR, White Balance, Prevent Overexposure to Infrared Light, HLC Adjustable by Client Software
Image Enhancement	BLC/3D DNR/HLC/SmartIR
Wide Dynamic Range (WDR)	120dB Note: When People & Vehicle Analytics is enabled, only DWDR is supported.
SNR	≥ 52 dB
Image Parameters Switch	Yes
Privacy Mask	Up to 4 Masks
ROI	1 Region
OSD Setting	Yes
<b>Audio</b>	
Audio Communication	Two-way audio
Audio Input	Yes
Audio Output	Yes

Audio Compression	Yes
Audio Sampling Rate	8KHz
Environment Noise Filtering	Yes
Audio Bit Rate	64 Kbps(G.711 alaw)
<b>Network</b>	
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS
API	Open Network Video Interface (Profile S)
Web Browser	Google Chrome® 57 and above Firefox® 52 and above Safari® 11 and above Microsoft® Edge 91 and above
Security	Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication
Simultaneous Live View	3 Main Streams & 3 Sub-Streams
Client	VIGI App, VIGI Security Manager, VIGI NVR, Web,VMS
Cloud	Yes
ONVIF	Yes
<b>Interface</b>	
Network Interface	1 RJ45 10/100M Self-Adaptive Ethernet Port, PoE
On-board Storage	Built-In Memory Card Slot, Support MicroSD Card, Up to 256 GB
Built-in Speaker	Yes
Built-in Microphone	Yes; Records Anything Going on within a 15-ft Radius of the Camera
Audio	N/A
Alarm	N/A
Reset Button	Yes
Power	DC Power Port
<b>Alarm and Event Management</b>	
Smart Event	<ul style="list-style-type: none"> <li>• Human &amp; Vehicle Classification</li> <li>• Intrusion Detection</li> <li>• Line-Crossing Detection</li> <li>• Region Entering Detection</li> <li>• Region Exiting Detection</li> <li>• Object Abandoned Detection</li> <li>• Object Removal Detection</li> <li>• Loitering Detection</li> <li>• Smart Frame</li> <li>• People Detection</li> <li>• Vehicle Detection</li> </ul>
Basic Event	<ul style="list-style-type: none"> <li>• Motion Detection</li> <li>• Video Tampering Detection</li> <li>• Exception ( Illegal Login)</li> <li>• Scene Change Detection</li> </ul>

Alarm Linkage	<ul style="list-style-type: none"> <li>• Memory Card Video Recording</li> <li>• Message Push</li> <li>• Audible Warning</li> <li>• White Light Flashing</li> </ul>
Linkage Method	N/A
Output Notification	Message Push
<b>Deep Learning Function</b>	
People & Vehicle Analytics	Search and filter to people or vehicle of interest based on many different attributes, making post-event search faster and easier.
<b>General</b>	
Operating Temperature	-30–60 °C
Storage Temperature	-40–60 °C
Operating Humidity	95% or Less (Non-condensing)
Storage Humidity	95% or Less (Non-condensing)
Power Supply	<ul style="list-style-type: none"> <li>• 12V DC <math>\pm</math> 5%, Max. 9.7 W, 5.5 mm Coaxial Power Plug</li> <li>• PoE: 802.3af/at, class 0, Max. 10.7 W</li> </ul>
Material	Metal
Protection	IP67
Product Dimensions (L x W x H)	74*74*184mm
Package Contents	VIGI Network Camera Quick Start Guide Waterproof Cable Attachments Mounting Accessories
Net Weight	0.525 Kg
Certifications	CE, NTRA, VCCI, KC, BSMI, FCC, IC
<b>Dimensions</b>	
<p>The technical drawing consists of two views of the camera. The left view is a side profile showing the camera's cylindrical body and lens assembly. Dimensions include a total length of 184(7.2) mm, a main body length of 107(4.2) mm, and a lens protrusion of 12(0.5) mm. The diameter of the main body is 74(2.9) mm, and the diameter of the lens housing is 66(2.6) mm. The right view is a top-down circular view of the camera's mounting base. It shows four mounting holes with a diameter of 4.5(0.2) mm, spaced 42.4(1.7) mm apart from the center. The overall diameter of the mounting base is also 42.4(1.7) mm.</p>	

\*Pole mounting kits and SD card are not included in the package.

Specifications are subject to change without notice and can be found at [www.tp-link.com](http://www.tp-link.com).

©2023 TP-Link